


: SS-300CA-XX\*  
: 300W LED  
: V10  
: 2023-02-01



崧盛电源  
LED DRIVER



LED DRIVER

CA

SS-300CA-56*	90-305Vac	302.4W	28-56V	36-56V	4.2-8.4A
--------------	-----------	--------	--------	--------	----------

8%	0.98	94%	90
----	------	-----	----



%

	100Vac			
	90Vac			
	47Hz			
			3.8A	100Vac
(120Vac)			40A	
(220Vac)			80A	
(277Vac)			120A	
			0.5W	
	0.95	0.98		
	0.90			
		8%	10%	100% 100% 100%
			20%	

	28V		56V	28-36V
	36V		56V	$P_o = V_o * I_o = 302.4W$
	5.4A		8.4A	8.4A 36V 5.4A 56V
AOC	4.2A		8.4A	
	4.66A		8.4A	DALI-2
			60V	
@ 120Vac	91.0%	92.3%		46V/6.5A
@ 220Vac	92.0%	94.0%		46V/6.5A
@ 277Vac	92.5%	94.2%		46V/6.5A
	-5%		+ 5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
			0.7S	230Vac DALI-2
	-2%		+2%	
	-2%		+ 2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	
			0.5W	DALI-2


10,600 hours	220Vac, 25 (MIL-HDBK-217F)
IP65	
90	
5	75
2100g	
182mm*71.5mm	X





FSB%Xö# FW"Xó& ÈG %, •h8G•f E, H „y 'xE@H "w•4€ RU Ýsf HPb #7f 2Pb u"H b™Yw•†"\$sG'VVfG &sG Px5D'sF\$px53 G4g%eh1@„,p&w5h2Wdii)...h2`4g&s gE,"\$vAa h™

α FP •s0¼ k‰ FP •s0üG b h




86-755-29358800




SHENZHEN SOSEN ELECTRONICS CO.,LTD

© 2023 SHENZHEN SOSEN ELECTRONICS CO.,LTD. All rights reserved. | 5G2 Ig8 2 | 86-755-29358800

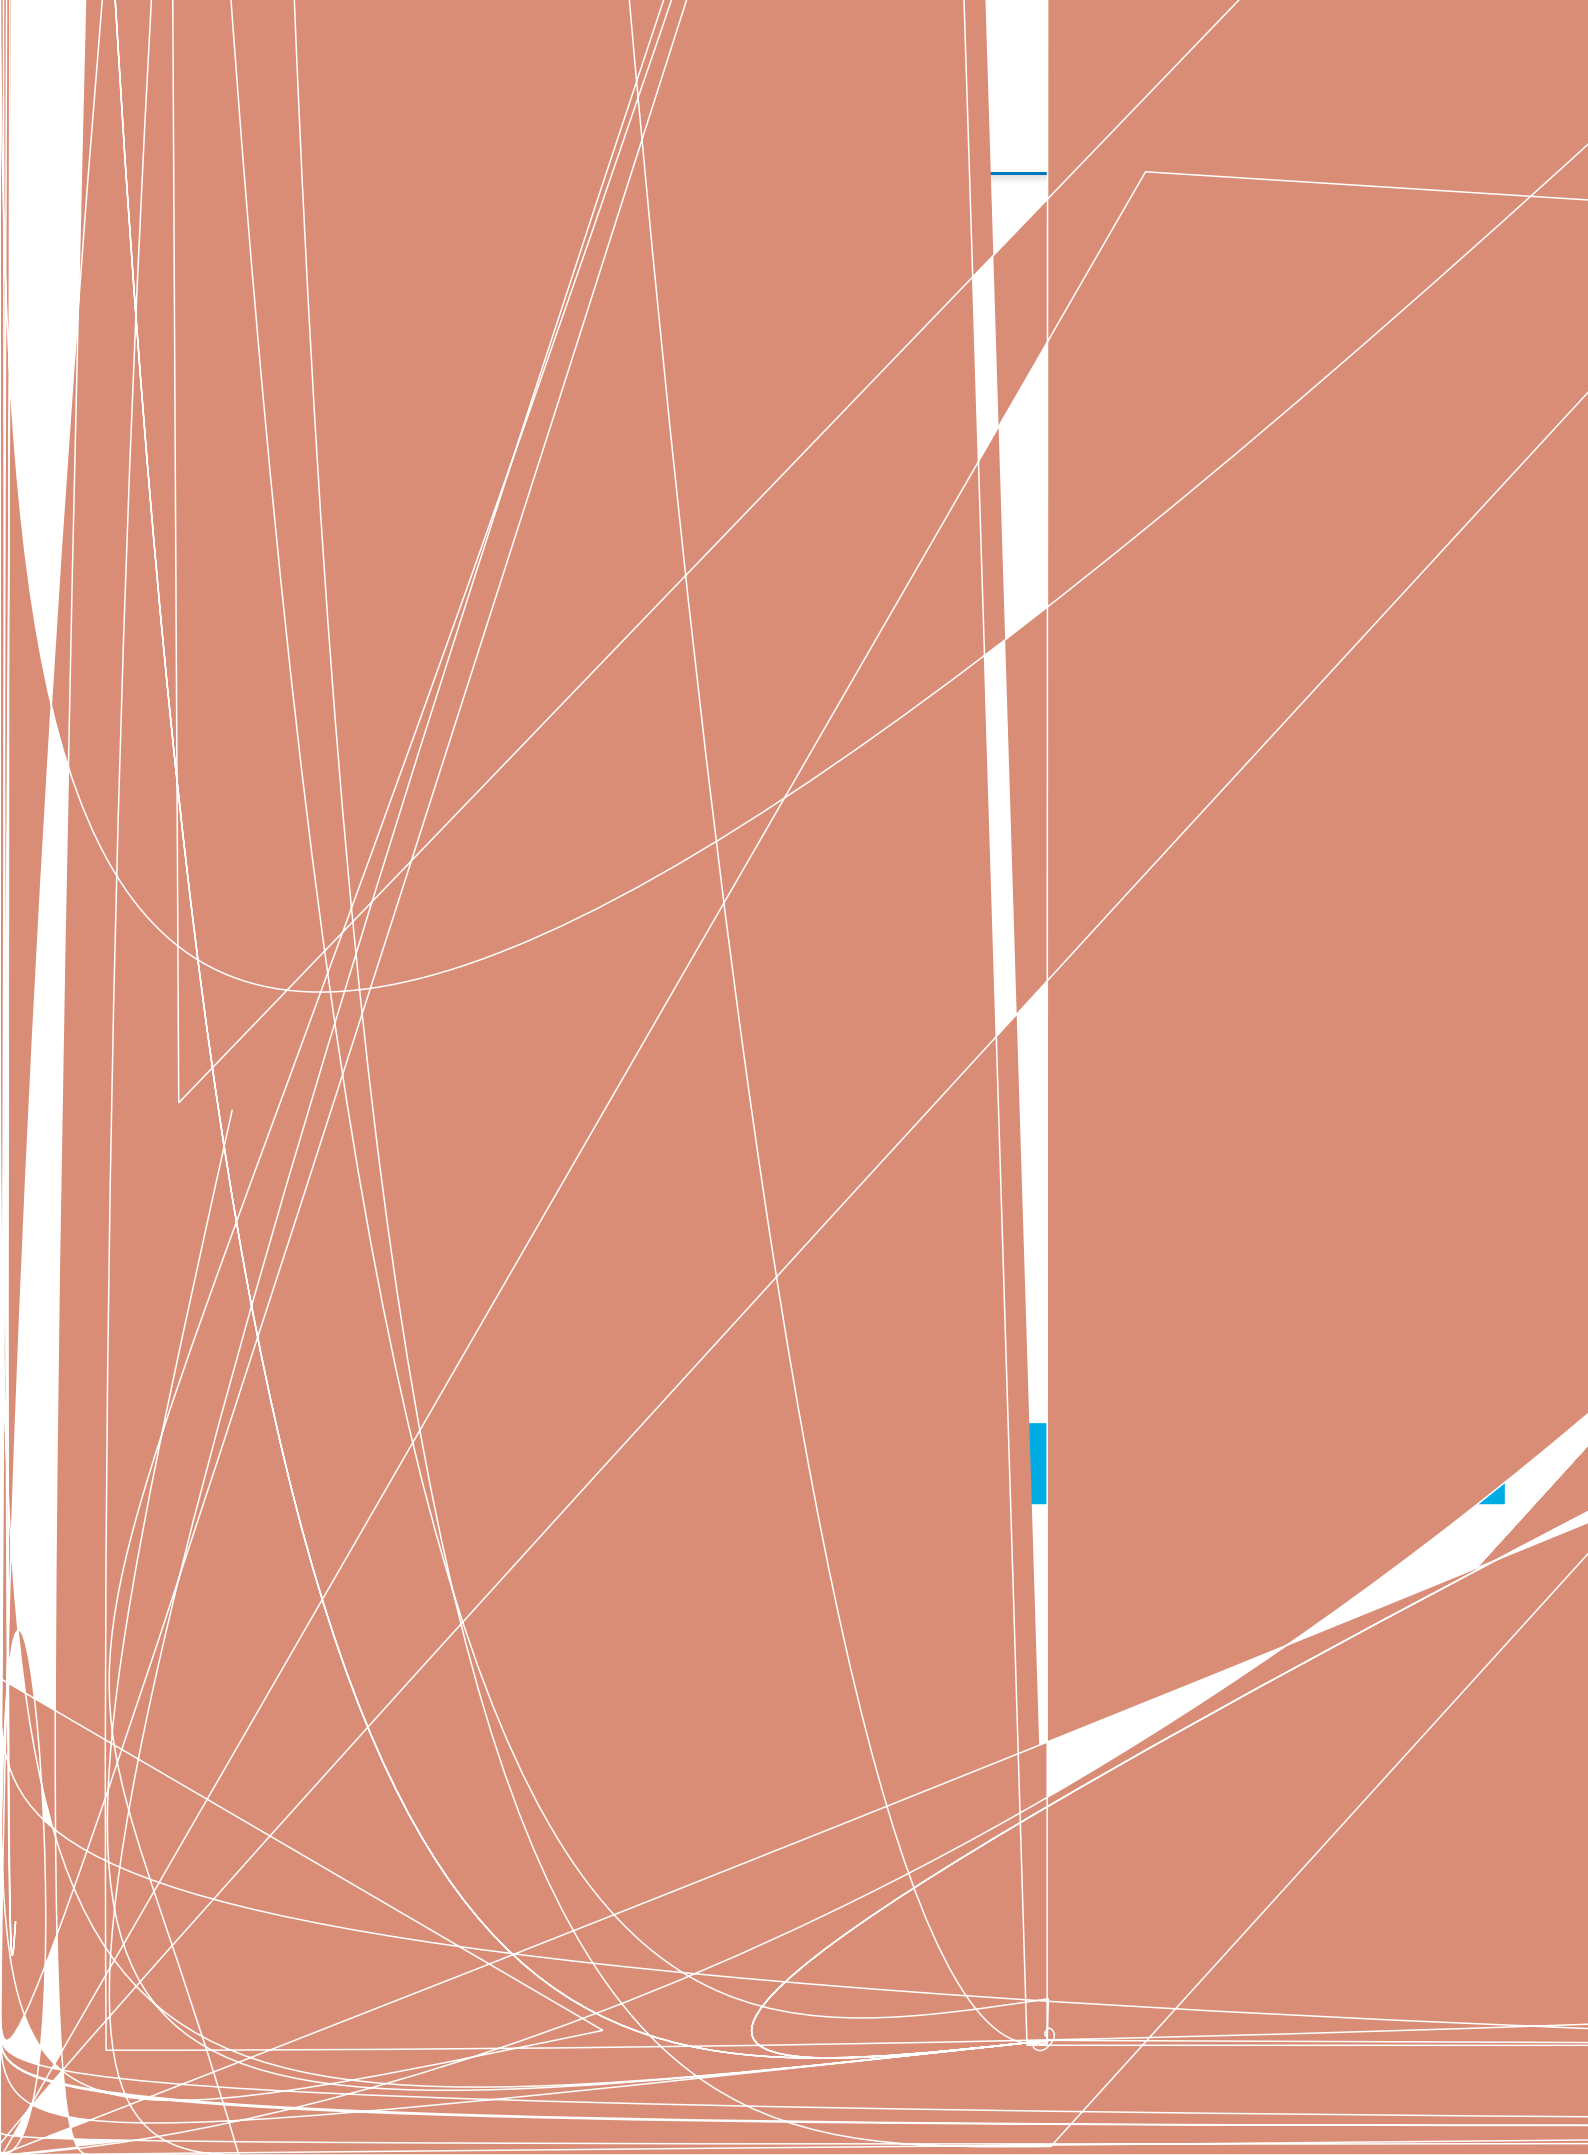


Vs. ( /AOC )

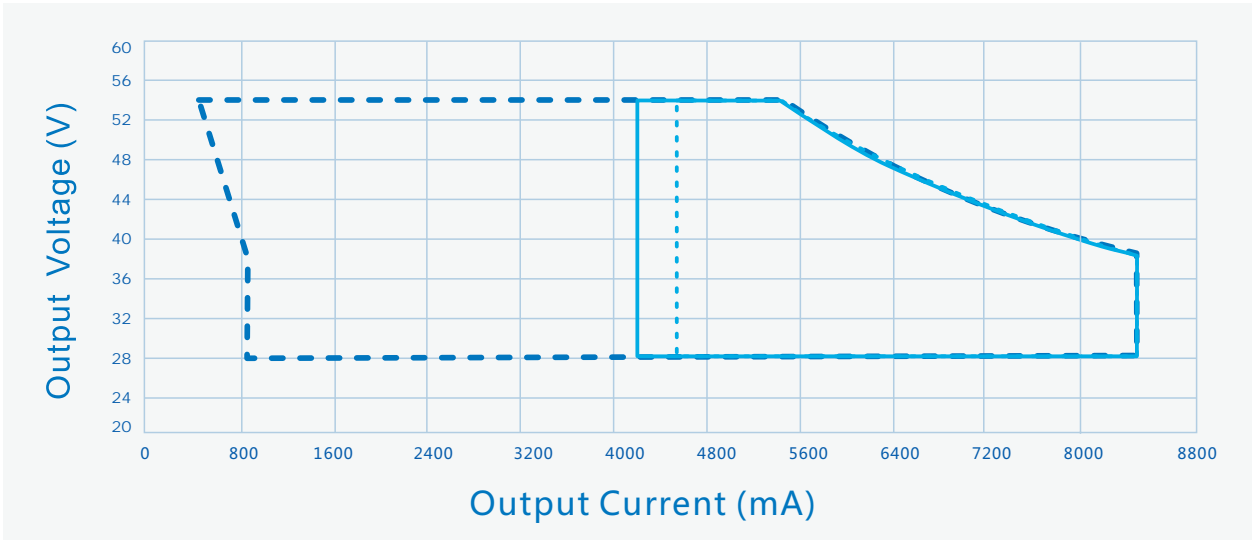

----- Dimming Window      ——— AOC Window      ..... AOC Window For DALI-2


Vs. (Vin=120Vac)

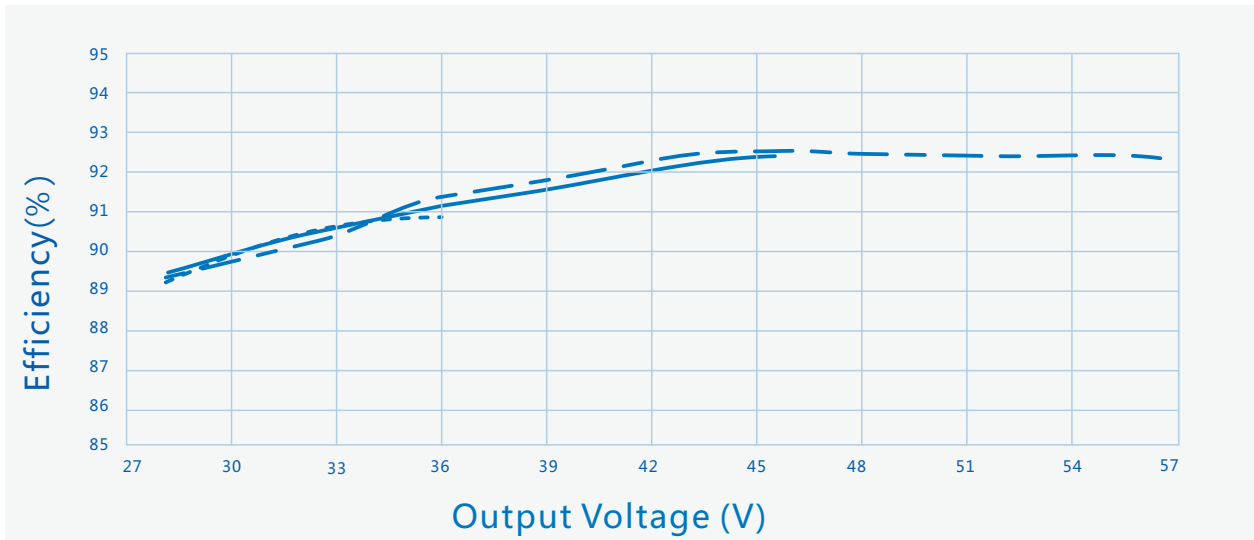

----- Io=8400mA      ——— Io=6500mA      - - - Io=5400mA




Vs. (Vin=220Vac)

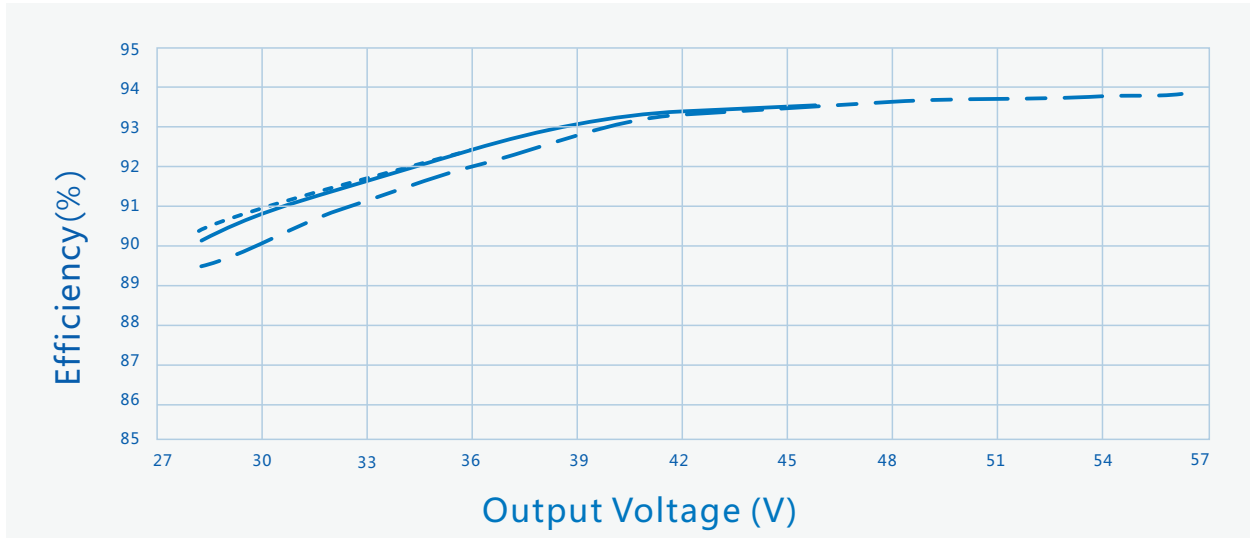

----- Io=8400mA    ——— Io=6500mA    - - - Io=5400mA

Vs. (Vin=277Vac)

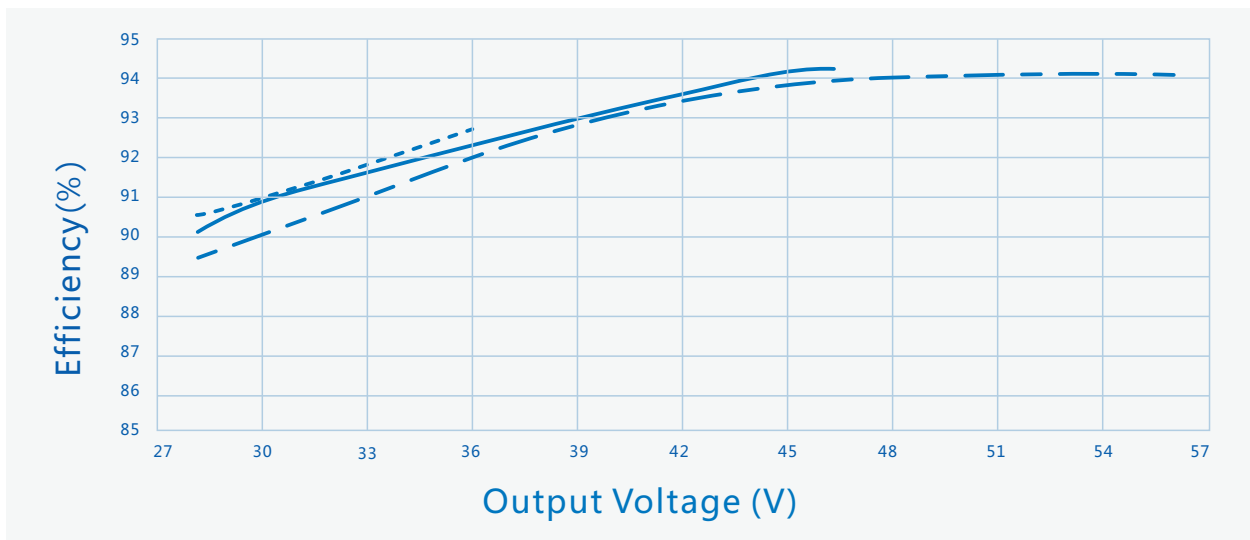


----- Io=8400mA    ——— Io=6500mA    - - - Io=5400mA







Vs. ( 50 )

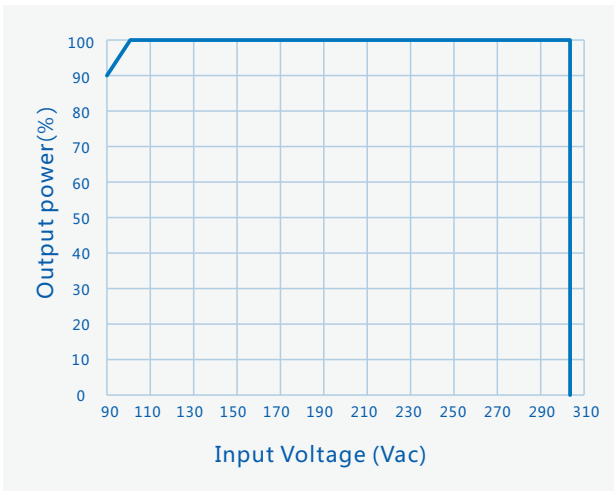


Vs.

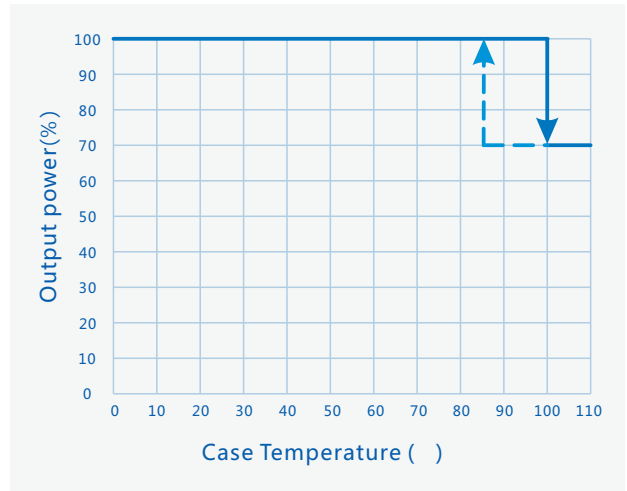

Vs.

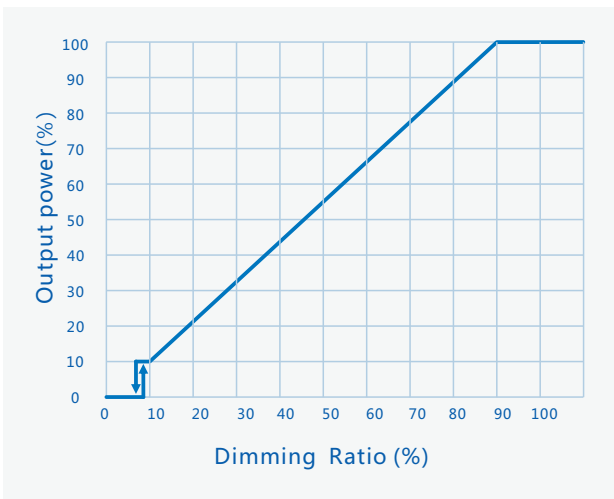

Vs.

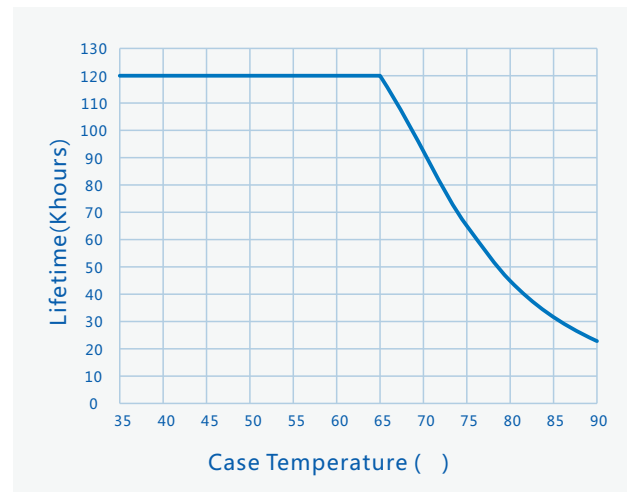







V00		2018/10/18	
V01	24V	2019/07/16	
V02	CCC	2019/10/29	
V03		2020/04/07	
V04		2020/04/27	
V05		2021/07/02	
V06		2021/09/02	
V07		2021/11/11	
V08	DALI-2	2022/01/18	
V09		2022/11/28	
V10		2023/02/01	

