


: SS-200VA-56*
: 200W LED
: V07
: 2023-02-01




	100Vac		277Vac	
	90Vac		220Vac	
	47Hz		53Hz	
			2.4A	100Vac

(120Vac)			60A	
(220Vac)				冷机启动
(277Vac)				冷机启动
				220Vac/50Hz, 空载
		0.98		220Vac/50Hz, 满载
				100-277Vac/50Hz, 70-100%载
		8%		220Vac/50Hz, 满载
				100-277Vac/50Hz, 70-100%载

V6V

	22V		56V	22-36V
	36V		56V	$P_o = V_o \cdot I_o = 200W$
	3.6A		5.6A	5.6A 36V, 3.6A 56V
AOC	2.8A		5.6A	
			60V	
	90.0%	91.0%		44V/4.6A
	92.0%	93.0%		44V/4.6A
	92.5%	93.5%		44V/4.6A
			+ 5%	
PK-AV		5%	10%	
			10%	
			0.5S	KAK 120Vac
			0.5S	220Vac
	-2%			

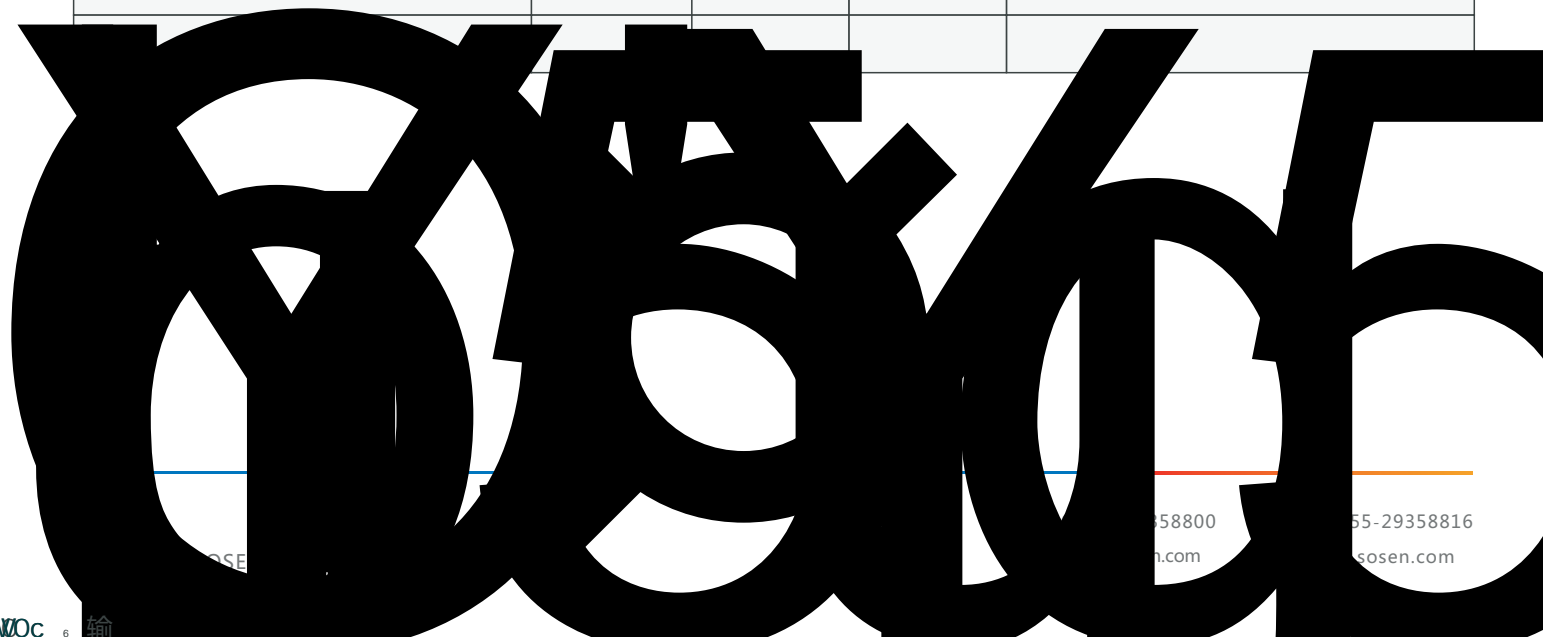


SS-200VA LED

		0V		12V	DIM+ 110uA
1-10V		10%Iomax		100%Ioset	DIM+/DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
		10Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
	72	62,000 hours		80%	
MTBF		164,000 hours		220Vac, 25 (MIL-HDBK-217F)	
		IP67			
		90			
		5		72	
		1100g			
		222mm*71mm*39.6mm		x x	

25 LED









			3750Vac	000Vac 00/a00
			1875Vac	
			3750Vac	
			1000Vac	
			80Vac 1000Vac	
			500Vac	
	10MΩ		500Vdc	
	0.1Ω		25A/1min	
	0.75mA		277Vac	


- 1. EMC
 - 2. LN
 - 3. CCC
- IEC 60598-1:2014 10.2 " "

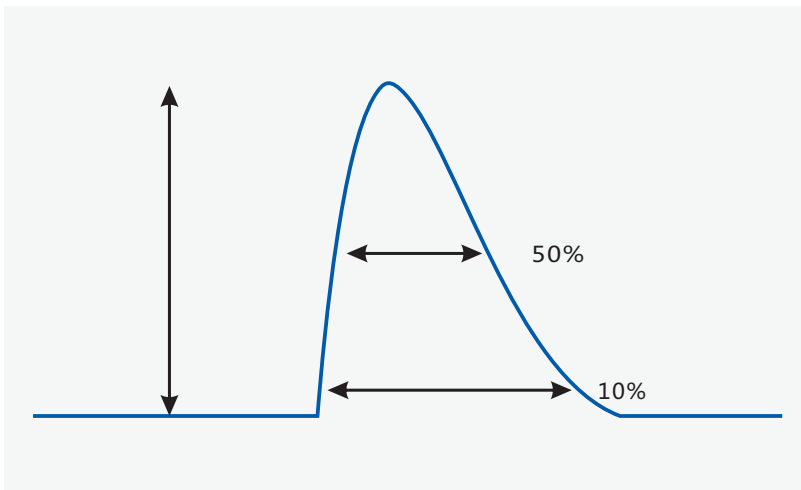

		T (@ 10%)	T (@ 50%)
120Vac	60A	120uS	
220Vac	110A		150uS
277Vac	125A	200uS	




Vs. (Vin=220Vac)

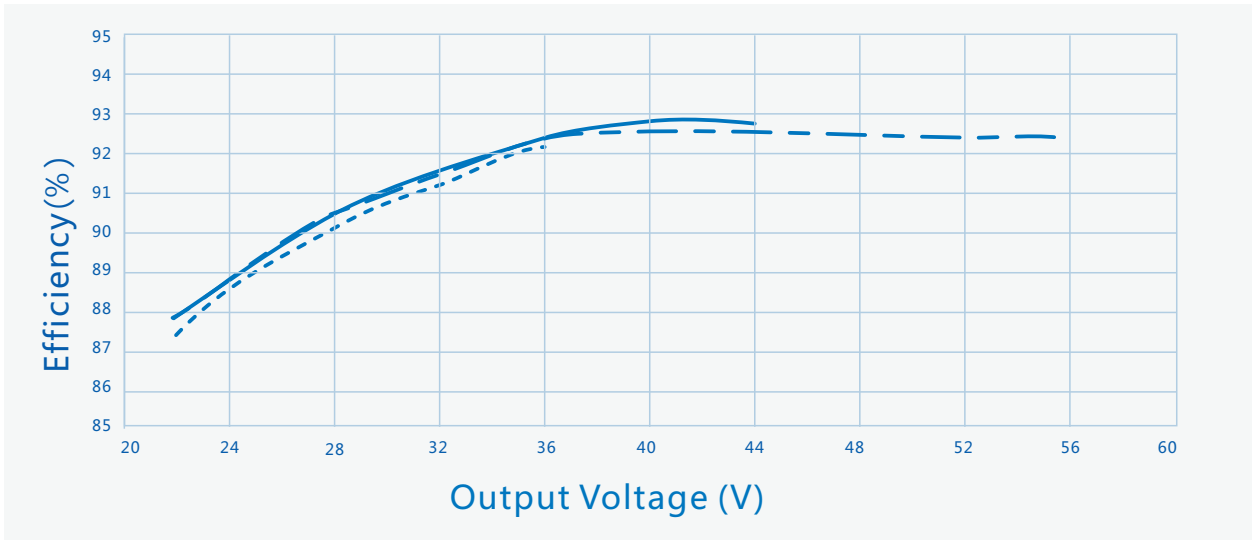

----- Io=5600mA ——— Io=4600mA - - - Io=3600mA

Vs. (Vin=277Vac)

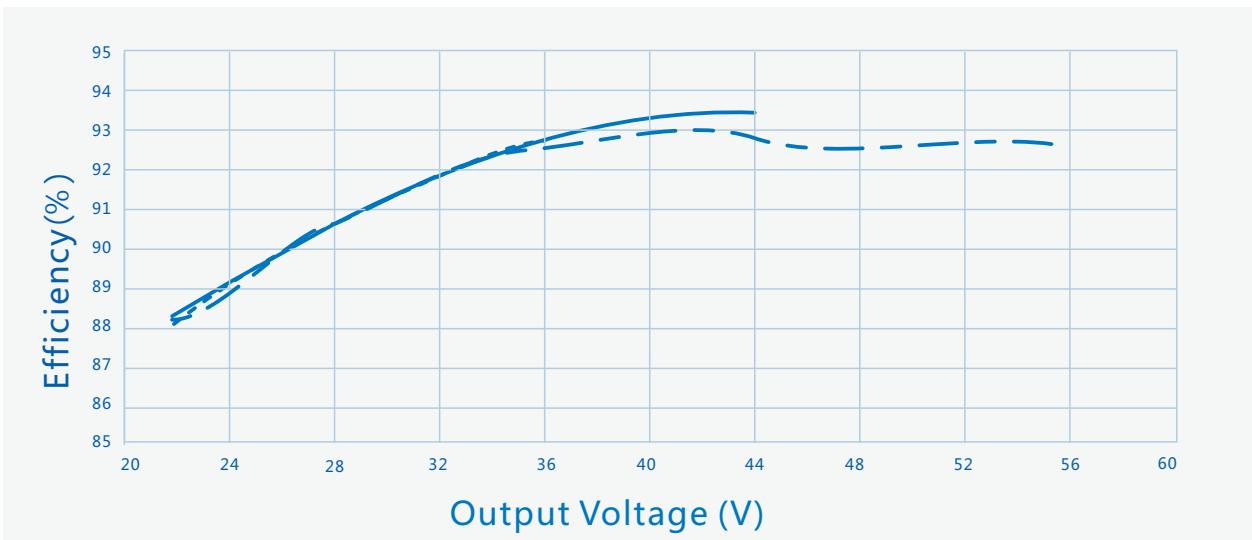

----- Io=5600mA ——— Io=4600mA - - - Io=3600mA




Vs.

Vs.





Vs.







1 , , 704

2

- mm) : × × = 495×385×162;

- 14

- 1.1kg 16.4kg

-

。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU



SS-200VA LED



V00		2018/10/18	
V01		2019/04/04	
V02		2019/07/04	
V03		2020/01/08	
V04		2020/03/23	
V05		2021/07/02	
V06	ó		

