

SEN LED Driver, ur Smart Choice

SS-240VA LED

: SS-240VA-56*

: 240W LED

: V08

: 2023-02-01

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			2.8A	100Vac

(120Vac)			60A	
(220Vac)			110A	冷机启动
(277Vac)			130A	冷机启动
			5W	220Vac/50Hz , 空载
	0.96	0.98		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 70-100%载

SS-240VA LED

	22V		56V	22-36V
	36V		56V	$P_o = V_o \cdot I_o = 240W$
	4.3A		6.7A	6.7A 36V, 4.3A 56V
AOC	3.3A		6.7A	
			60V	
@ 120Vac	89.0%	90.5%		48V/5.0A
@ 220Vac	91.5%	93.0%		48V/5.0A
@ 277Vac	92.0%	93.5%		48V/5.0A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	



SS-240VA LED



1-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+/DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
		10Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
	75	62,000 hours		80%	
MTBF		152,000 hours		220Vac, 25 (MIL-HDBK-217F)	
		IP67			
		90			
		5		75	
		1200g			
		244mm*71mm*39.6mm		x x	

25 LED



--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	


EMI/EMS	/	
---------	---	--

	EN55015:2013+A1:2015	
	EN55015:2013+A1:2015	
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (模10kV , 模6kV)
	IEC/EN 61000-4-12	B (6kV, 6kV)

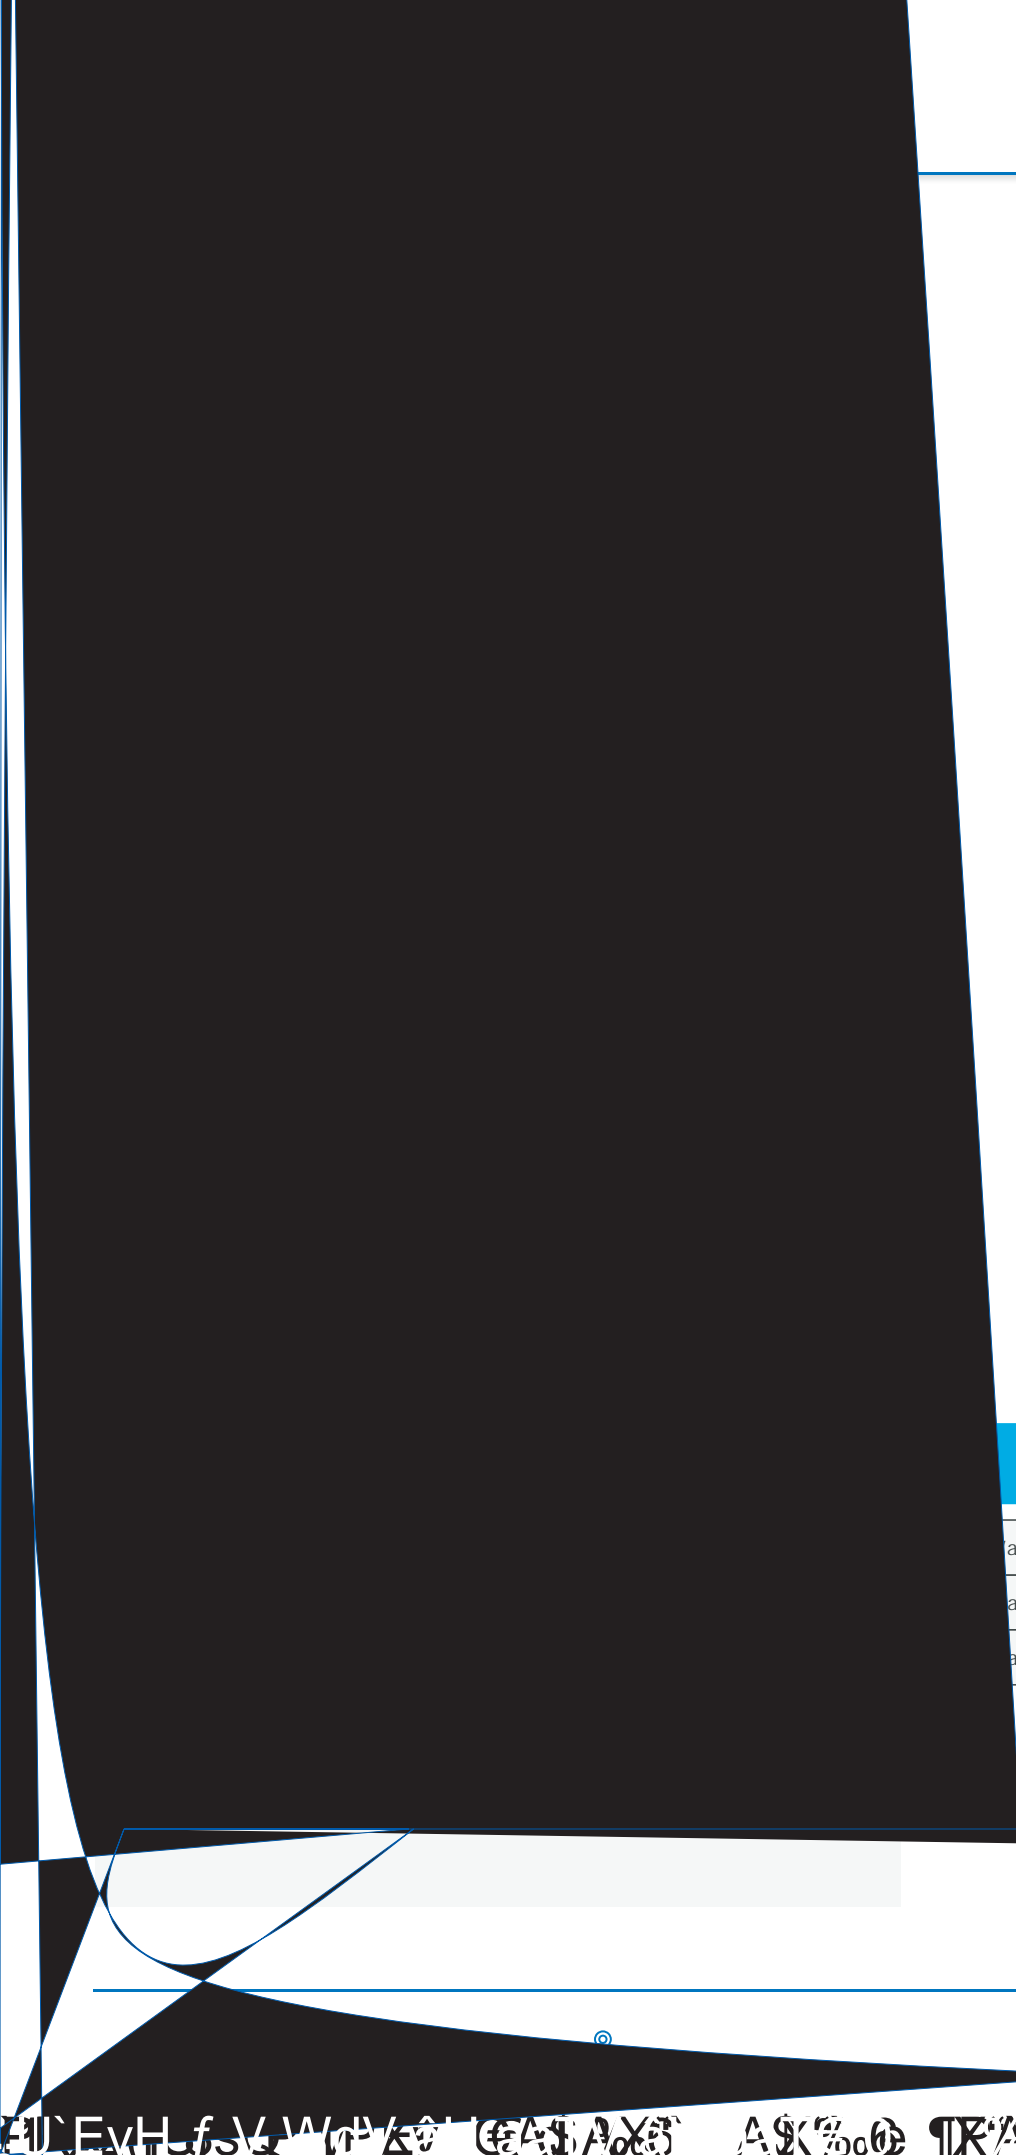


		T(@ 10%)	T(@ 50%)
ac	60A	120uS	
ac	110A		150uS
ac	130A	200uS	

Vs. (/AOC)

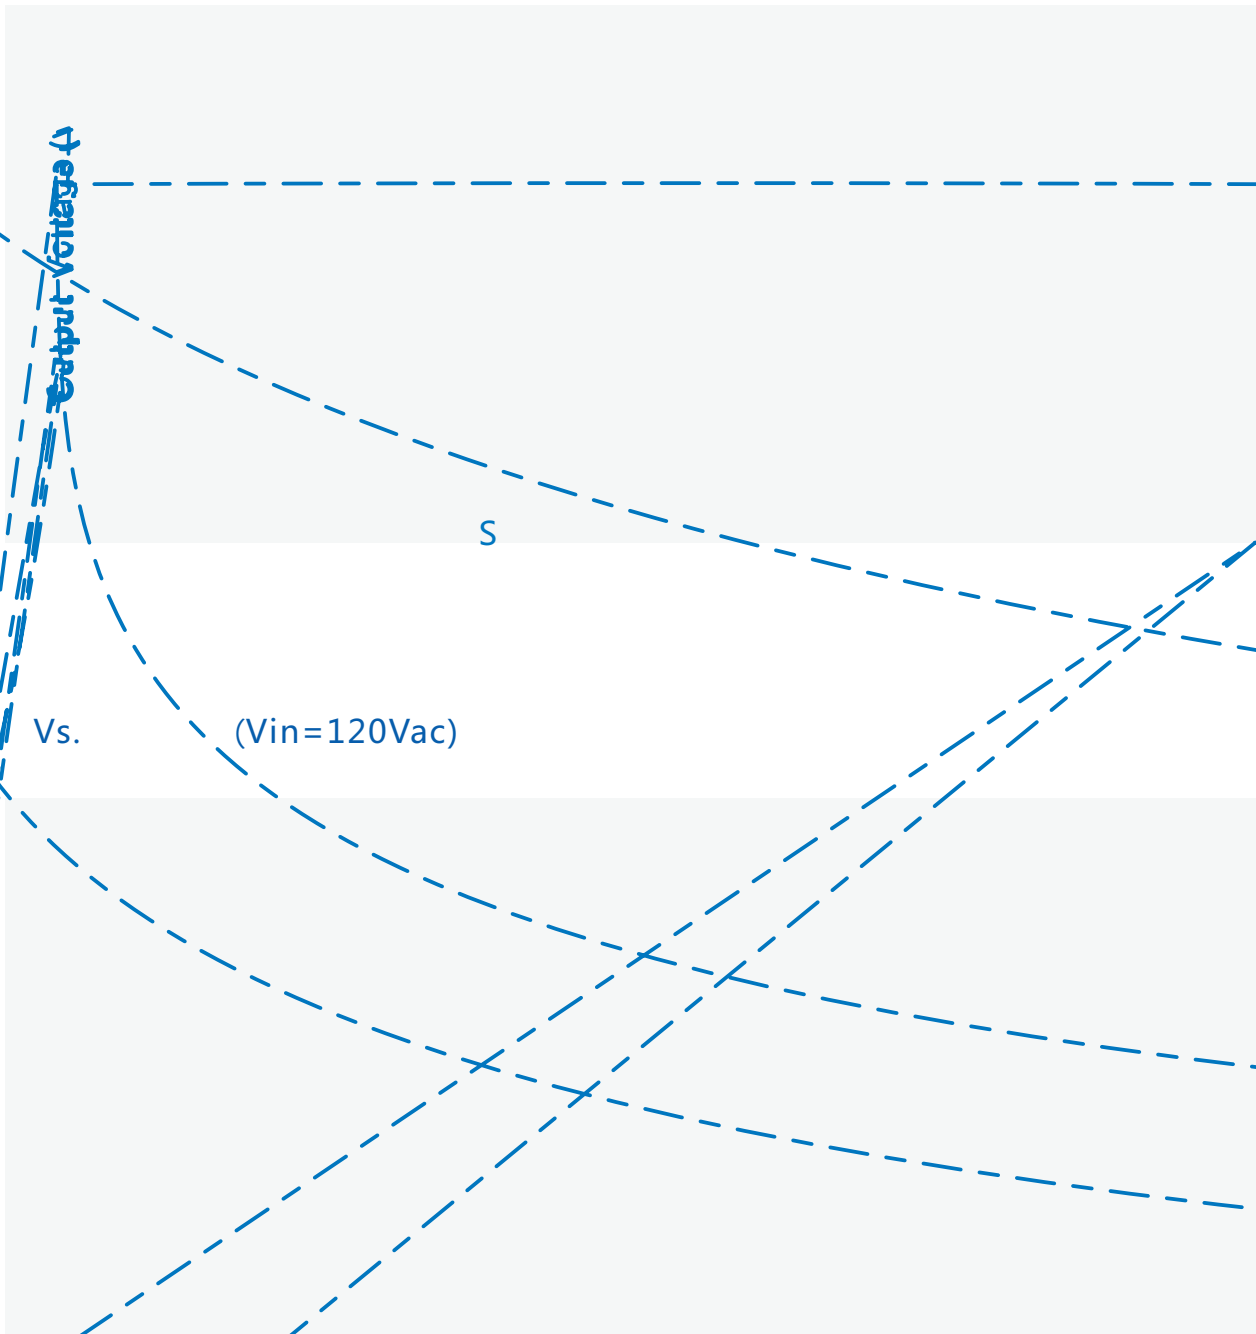


Io=667mA Io=5000mA Io=4300mA

Vs. (Vin=220Vac)

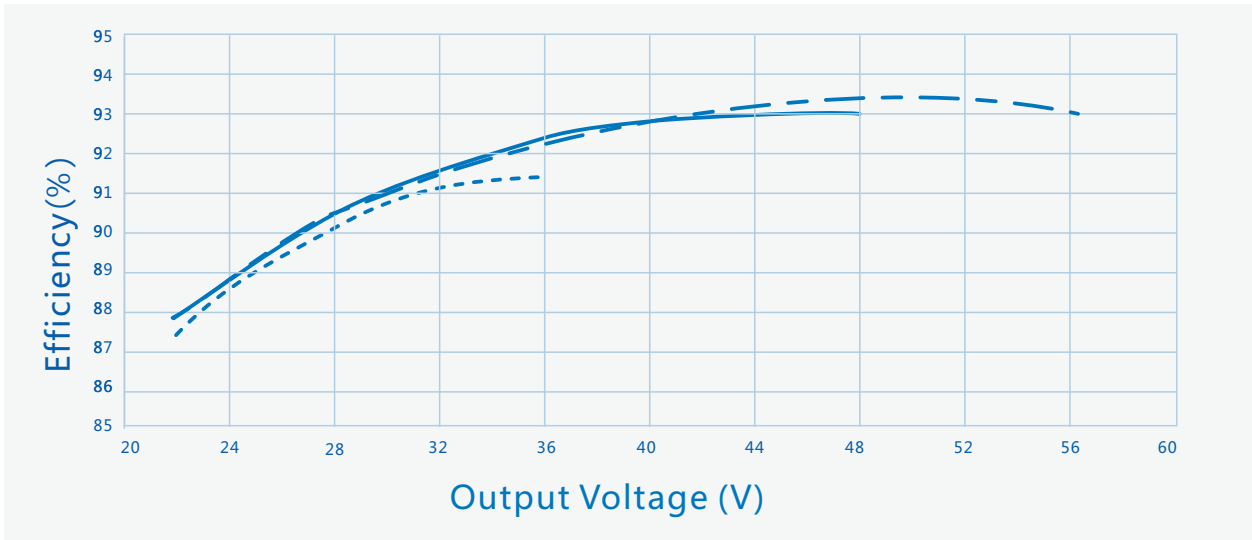

----- Io=6670mA ——— Io=5000mA - - - Io=4300mA

Vs. (Vin=277Vac)

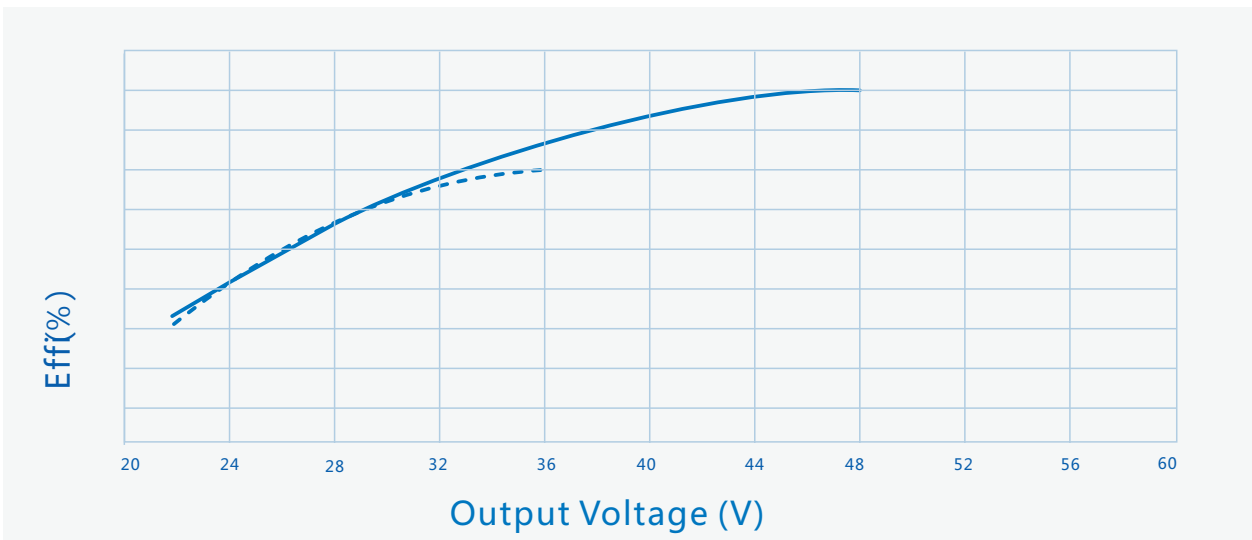

----- Io=6670mA ——— Io=5000mA - - - Io=4300mA




SS-240VA

LED


Vs.

Vs.


Vs. (50)

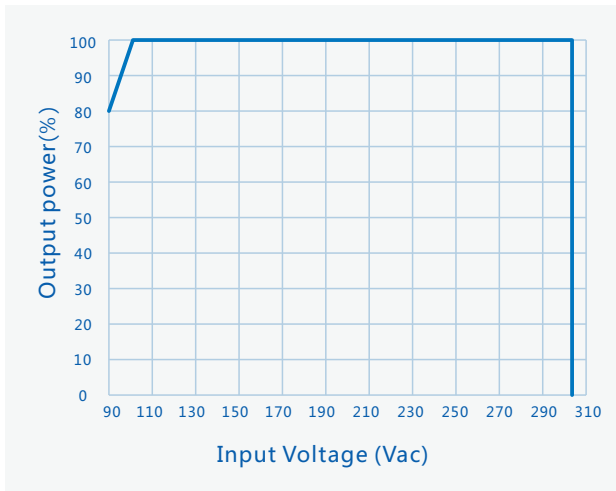


Vs.

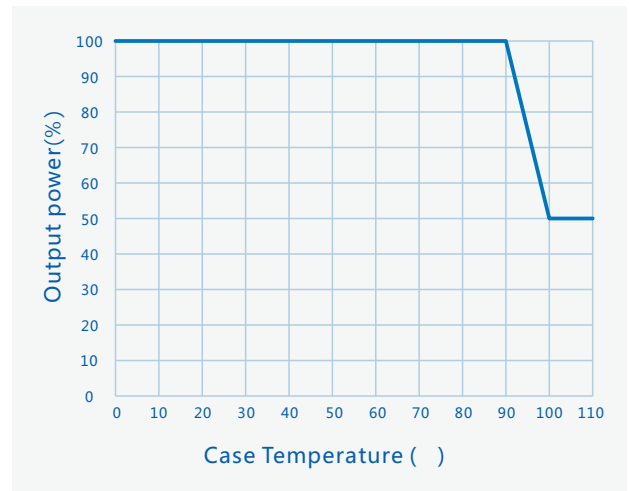


Vs.

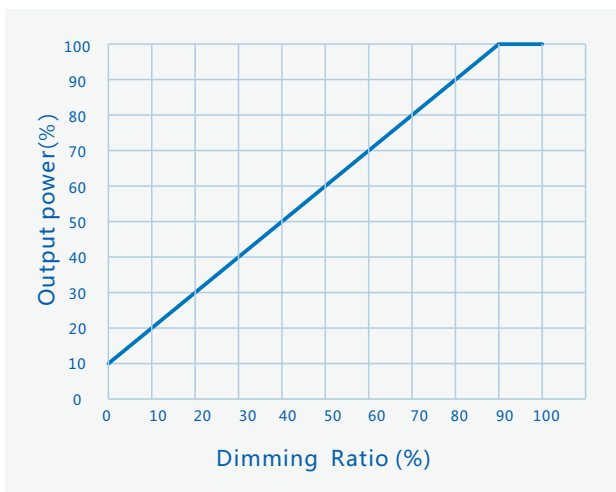

Vs.

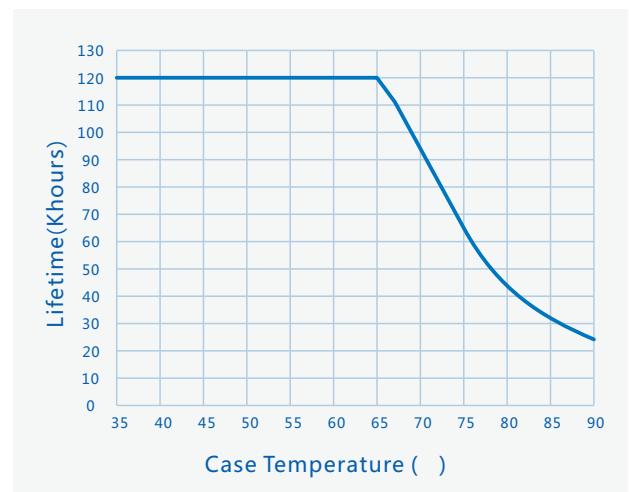





1 , , 704

2

- mm) : × × = 495×385×162;

- 14

- 1.2kg 17.8kg

-

。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



V00		2018/10/18	
V01		2019/04/04	
V02	TC	2019/05/30	
V03		2019/07/04	
V04		2020/03/23	
V05		2021/07/02	
V06		2021/09/02	
V07		2022/06/02	
V08		2023/02/01	

