

SOSEN LED Driver, Your Smart Choice

SS-150CA LED

: SS-150CA-XX*

: 150W LED

: V10



: 2023-02-01



- 92%
- 0V PWM
-
- :
- 2A
-
- IP6
- T
- 过温/
-



CE IP65 Class P

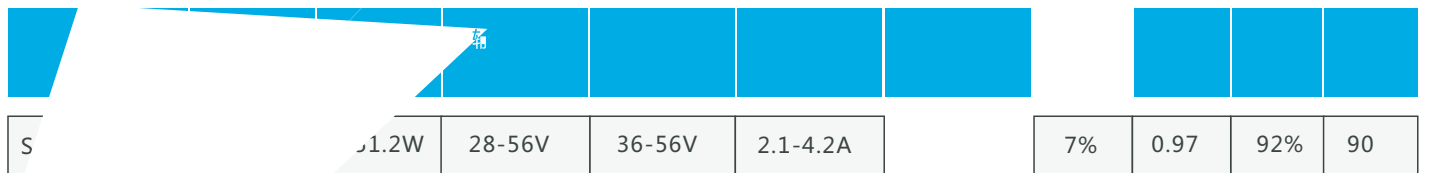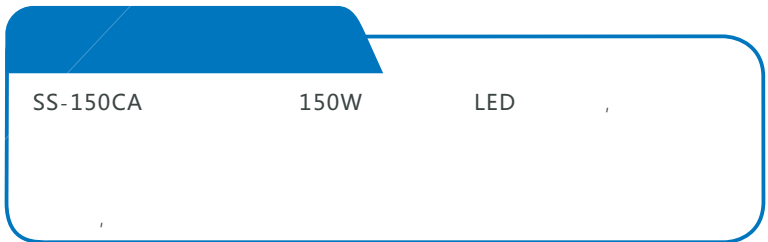

ac 25°C;
LED

LED





				100Vac

--


冷机启动
冷机启动




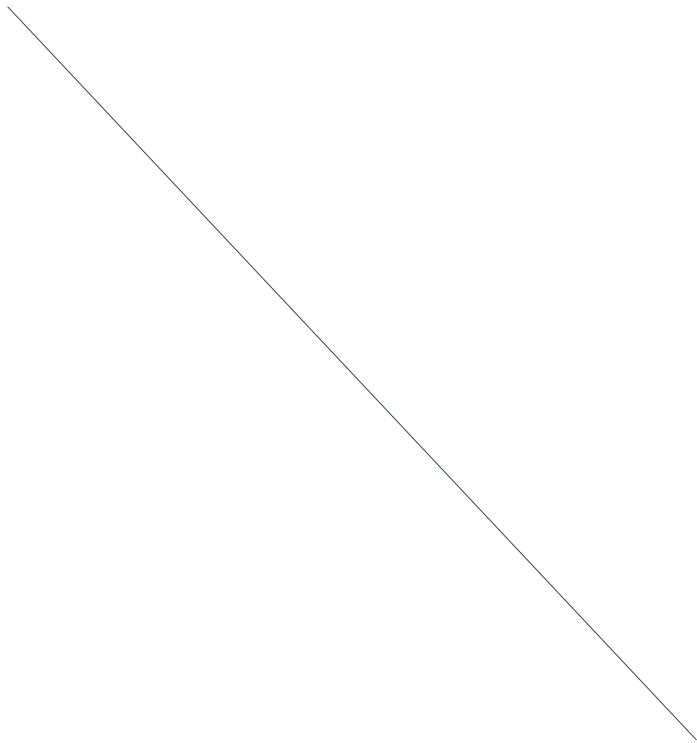
220Vac/50Hz 220Vac/50-

	2C		C	Y



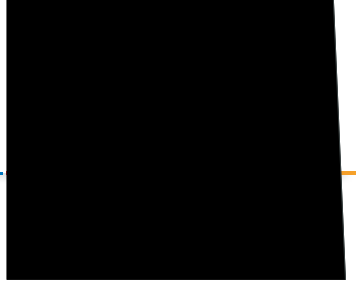




Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS		
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5;ANSI/C82.77-5-2017	B (6kV, 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV, 6kV)




Vs. (/AOC)

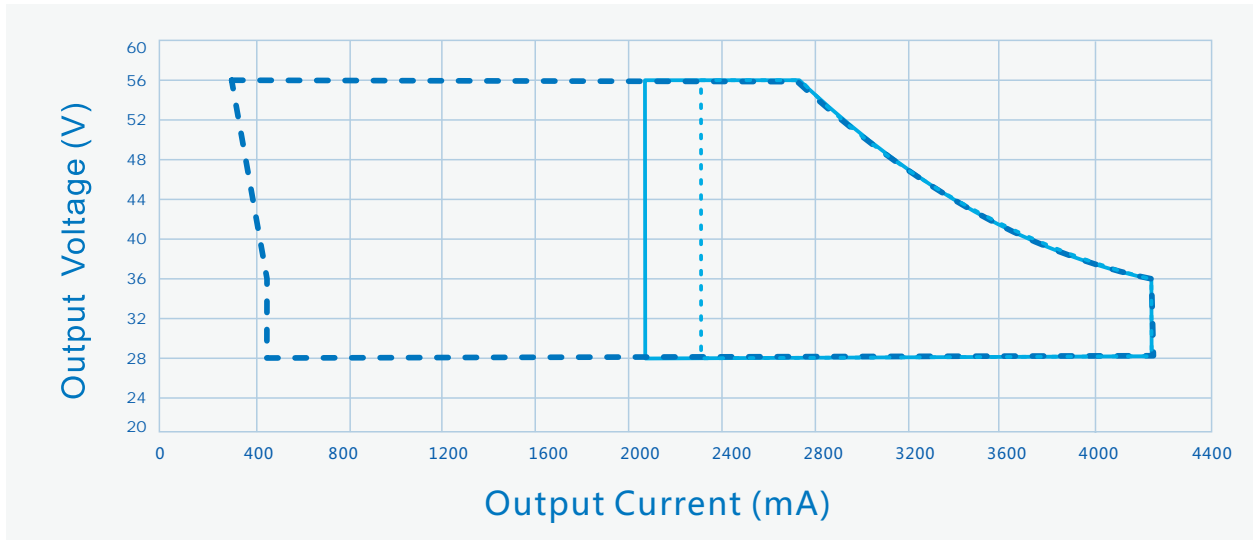

----- Dimming Window ——— AOC Window AOC Window For DALI-2


Vs. (Vin=120Vac)

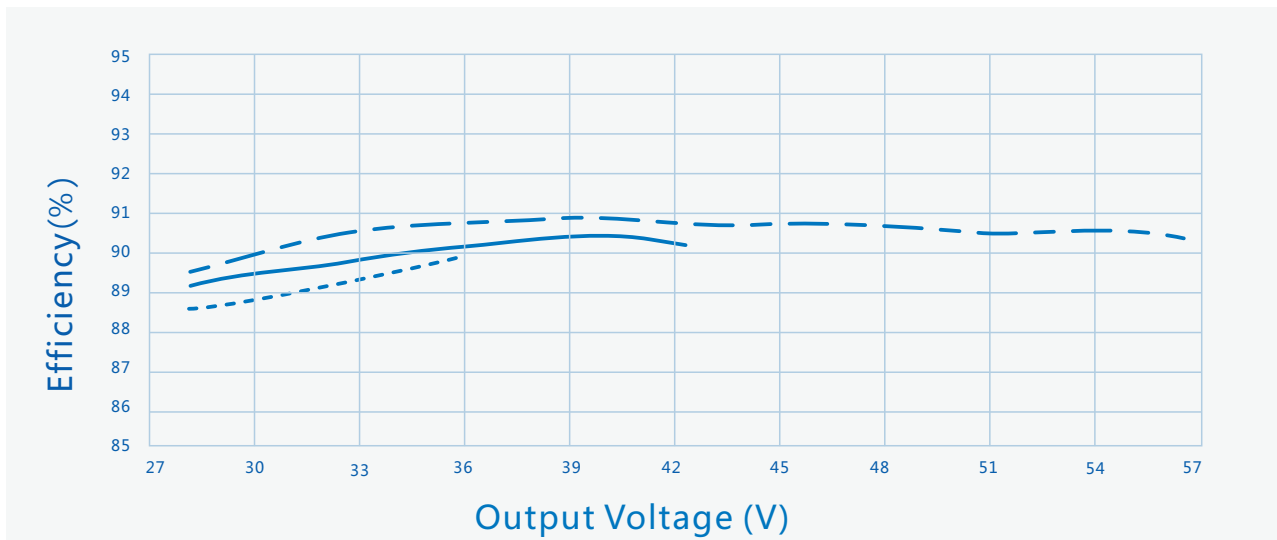

----- Io=4200mA ——— Io=3500mA - - - Io=2700mA




Vs. (Vin=220Vac)

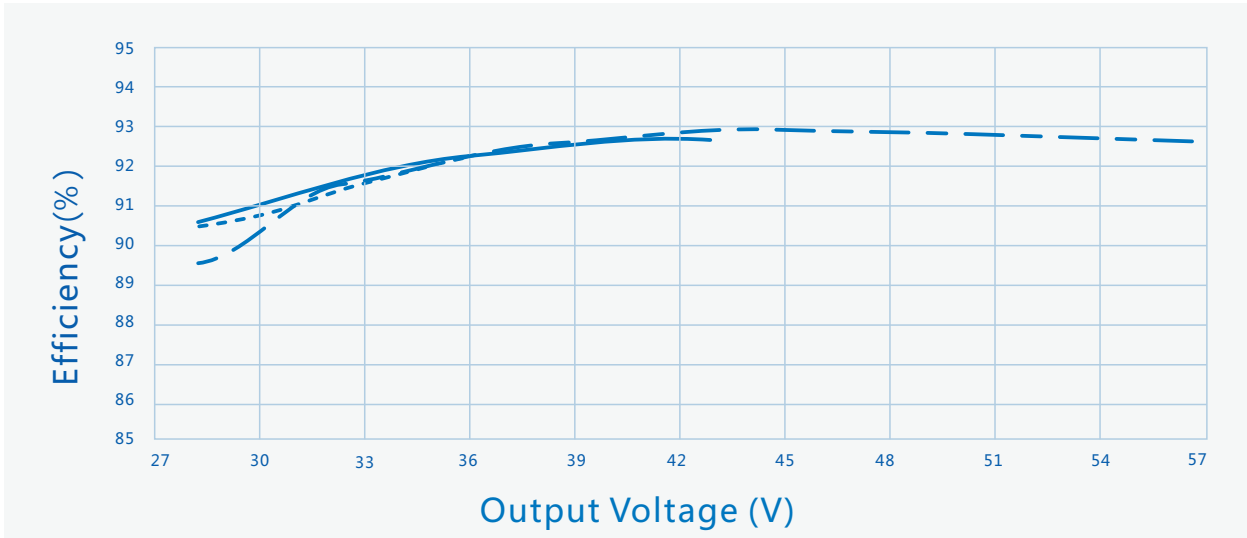

----- Io=4200mA ——— Io=3500mA - - - Io=2700mA

Vs. (Vin=277Vac)

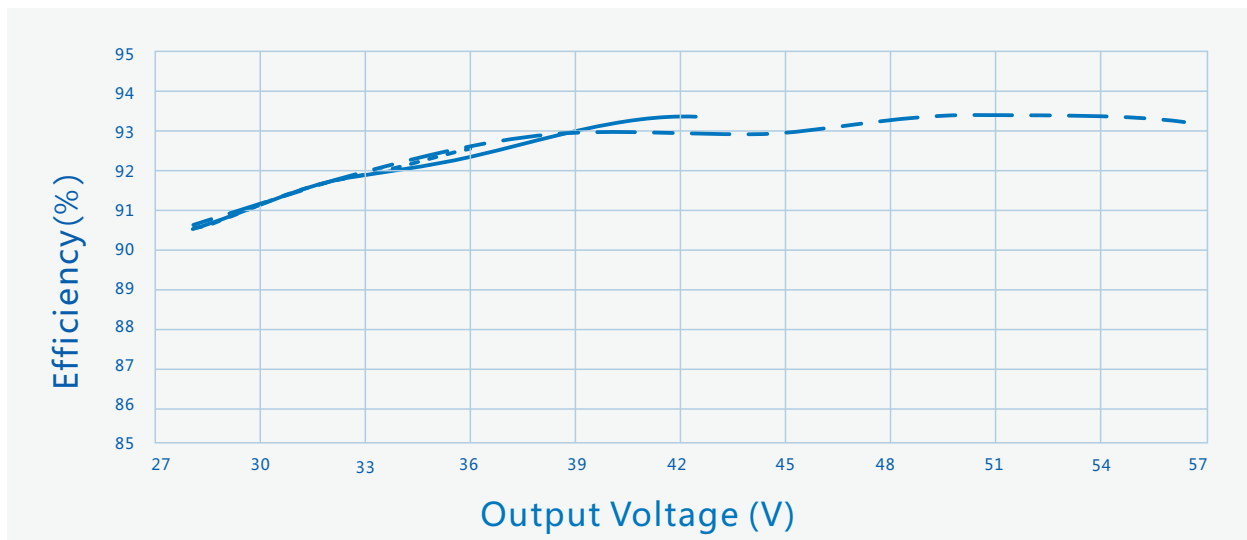


----- Io=4200mA ——— Io=3500mA - - - Io=2700mA



Vs.


Vs.






SS-150CA LED

Vs. (60)

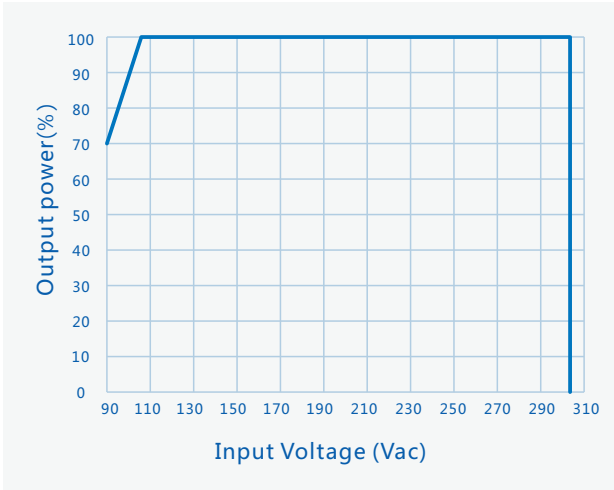


Vs.

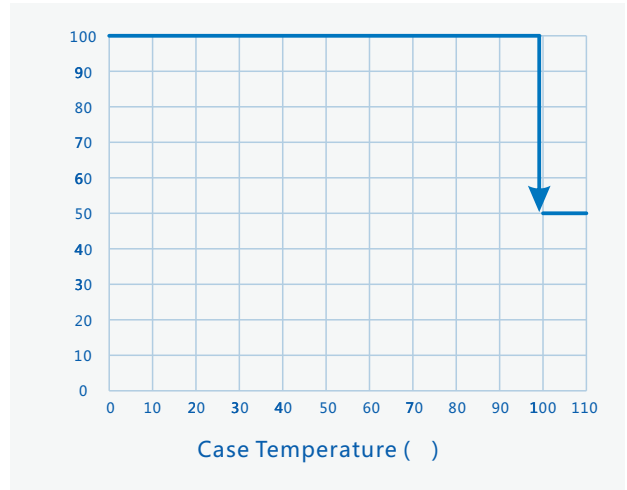


Vs.

Vs.

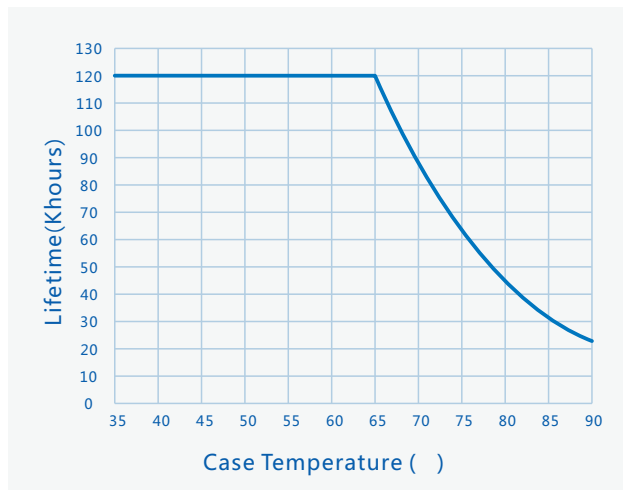

SS-150CA LED

		mm(In.)
PG	A	M12*1.5
	4-B	7.0(0.28)
	D	151.0(5.95)
	H	71.5(2.82)
	Z	M12*1.75(20mm) G1/2(17mm)
	R	M4*0.7
	W	132.0(5.2)
	W1	132.0(5.2)
Tc	X	50(1.97)
Tc	Y	10(0.4)

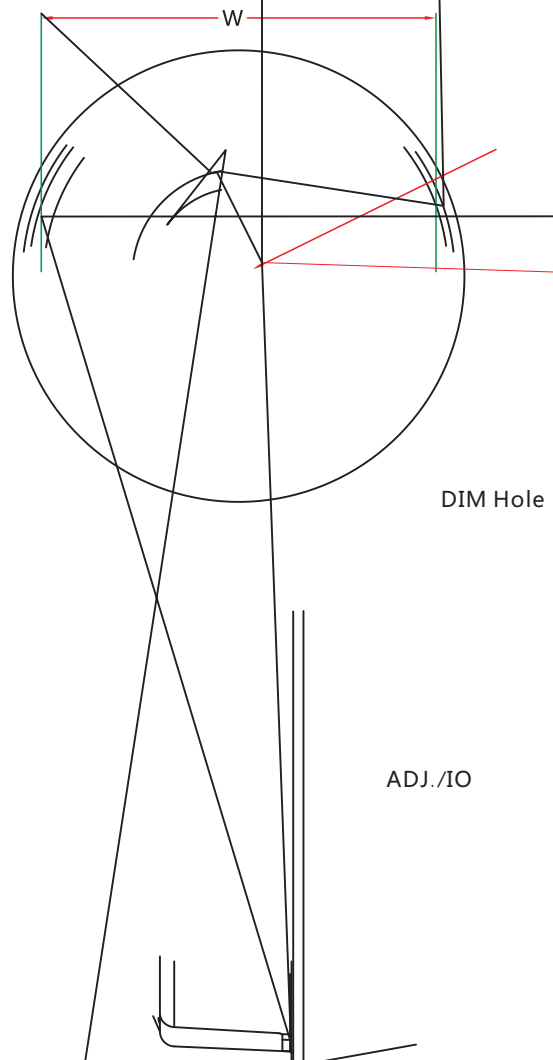



1 704
2

- mm) : × × = 495×385×162;
- 9
- 1.5kg 15kg
-
。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。
贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU



SS-150CA LED



VO	V00		2019/09/17	
	V01	CCC	2019/10/29	
	V02		2020/04/07	
	V03		2020/09/27	
	V04 C			

