

: SS-240VH-XXX
: 240W LED
: V07
: 2023-02-01



(SS-240VH-56B)


	100Vac		277Vac	120Vac
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			2.8A	100Vac
			275W	100Vac
(120Vac)			60A	
(220Vac)			135A	冷机启动
(277Vac)			175A	冷机启动
			5W	220Vac/50Hz , 空载
	0.97	0.98		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 70-100%载



(SS-240VH-56B)

	28V		56V	28-36V
	36V		56V	$P_o = V_o \cdot I_o = 241.2W$
	4.3A		6.7A	6.7A 36V, 4.3A 56V
AOC	0.7A		6.7A	
			60V	
@ 120Vac	90.0%	92.0%		36V/6.7A
@ 220Vac	92.5%	94.5%		36V/6.7A
@ 277Vac	93.0%	95.0%		36V/6.7A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	




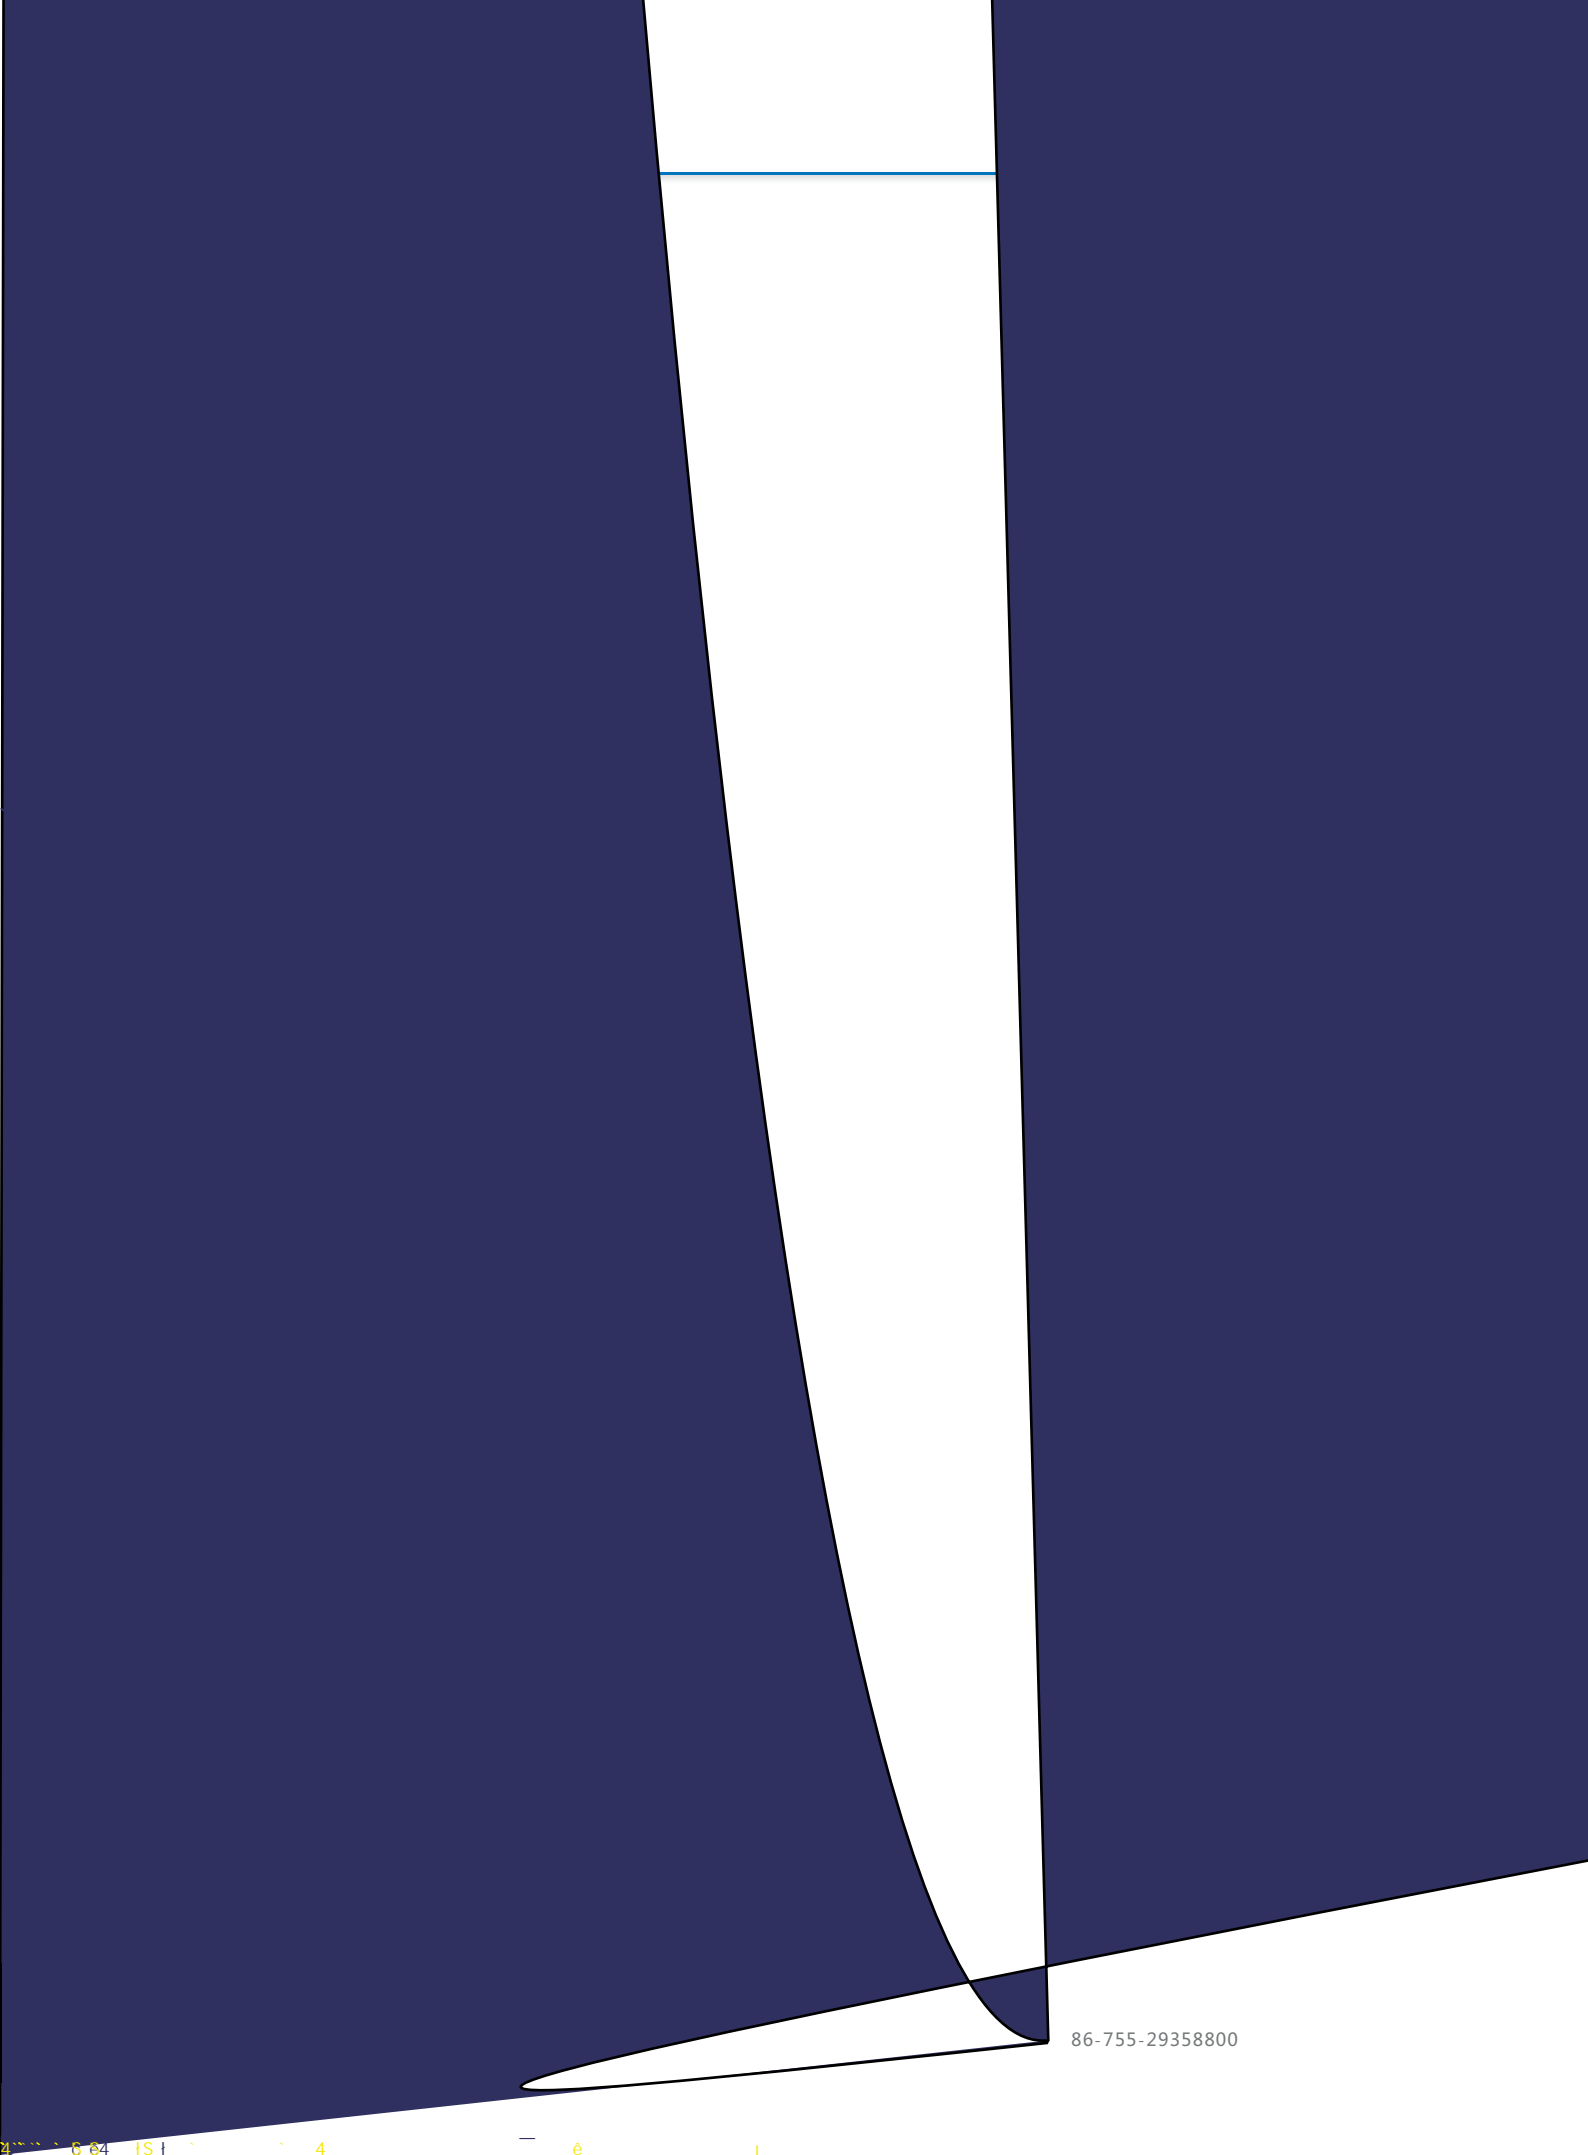


86-755-29358800


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015		
EAC	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 TP TC 004/2011 TP TC 020/2011		
RCM	AS/NZS61347.2.13	✓	
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/	
	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B (10kV, 6kV)
	ANSI/C82.77-5-2017	B (6kV, 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV, 6kV)




Vs. (/AOC)

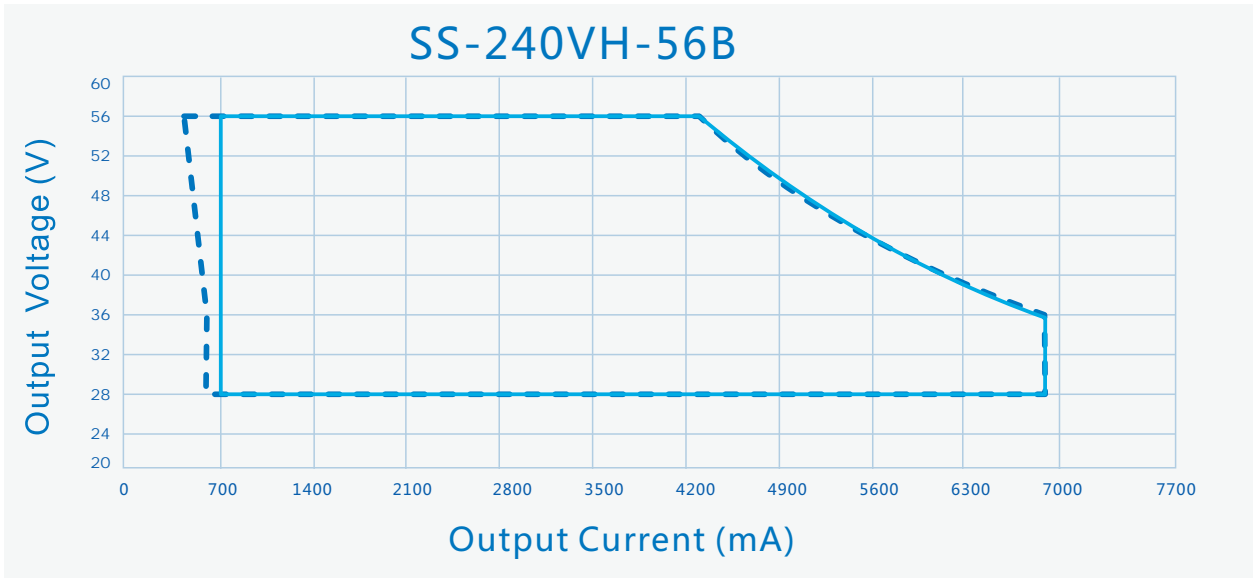

----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)

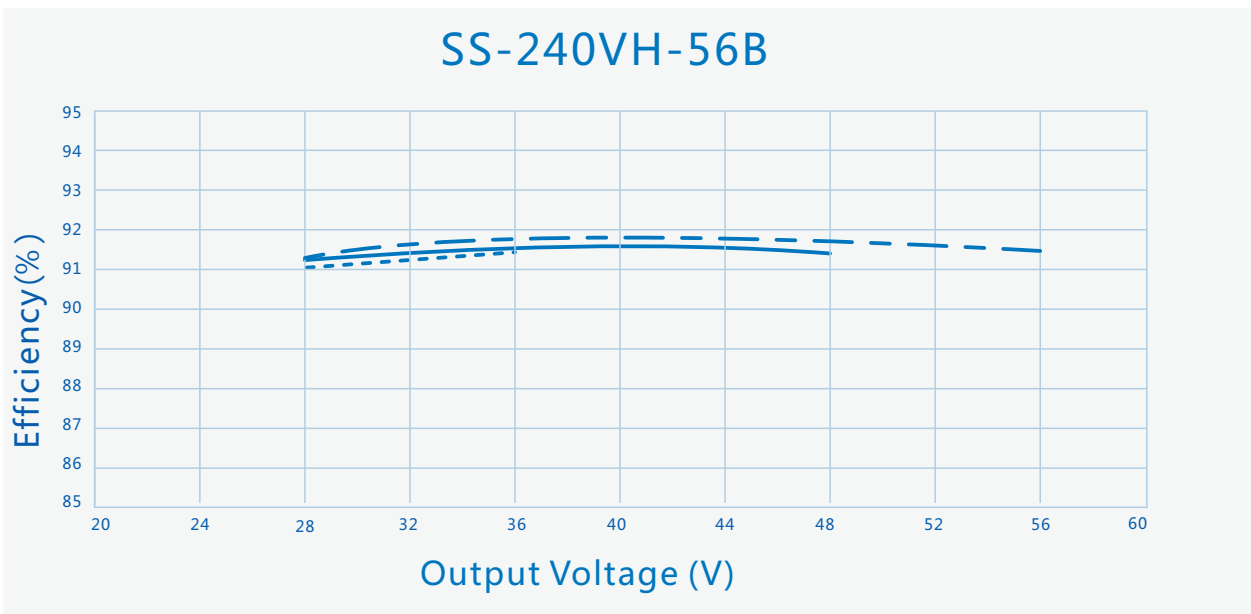

----- Io=6700mA ————— Io=5000mA - - - Io=4300mA





Vs.

Vs.





SS-240VH LED



V00		2020/09/01	
V01		2020/12/23	
V02		2021/09/02	
V03	SS-240VH-E56B	2022/03/02	
V04	SS-240VH-E343B	2022/05/08	
V05	10-0V	2022/06/22	
V06	SS-240VH-E	2022/12/12	
V07		2023/02/01	

