


: SS-100SA-XX
: 100W LED
: V09
: 2023-02-01





型号								
----	--	--	--	--	--	--	--	--



" * "

" * "	DALI (:D)	AUX 12V (:H)	NTC (:N)	Timing	0-10V/PWM Dim /Resistor (:B)	
BH		✓			✓	

--	--	--	--	--	--	--

	277Vac		480Vac	
	249Vac		528Vac	
	47Hz	50/60Hz	63Hz	
			0.6A	277Vac
			120W	277Vac
(277Vac)			50A	
(347Vac)			70A	
(480Vac)			90A	
			1.5W	347Vac/60Hz
	0.93	0.95		347Vac/60Hz , 满载
	0.90			277-480Vac , 80%-100% 载
		7%	10%	347Vac/60Hz , 满载
			20%	277-480Vac , 80%-100% 载

	22V		56V	22-32V
	32V		56V	$P_o = V_o * I_o = 100.8W$
	1.8A		3.0A	3.0A 32V 1.8A 56V
AOC	1.2A		3.0A	
			60V	
		90.5%		56V/1.8A
		91.0%		
		91.0%		
			+ 5%	
PK-AV		5%	10%	
			10% 护	
	-2%			

-2%











Vs. /AOC

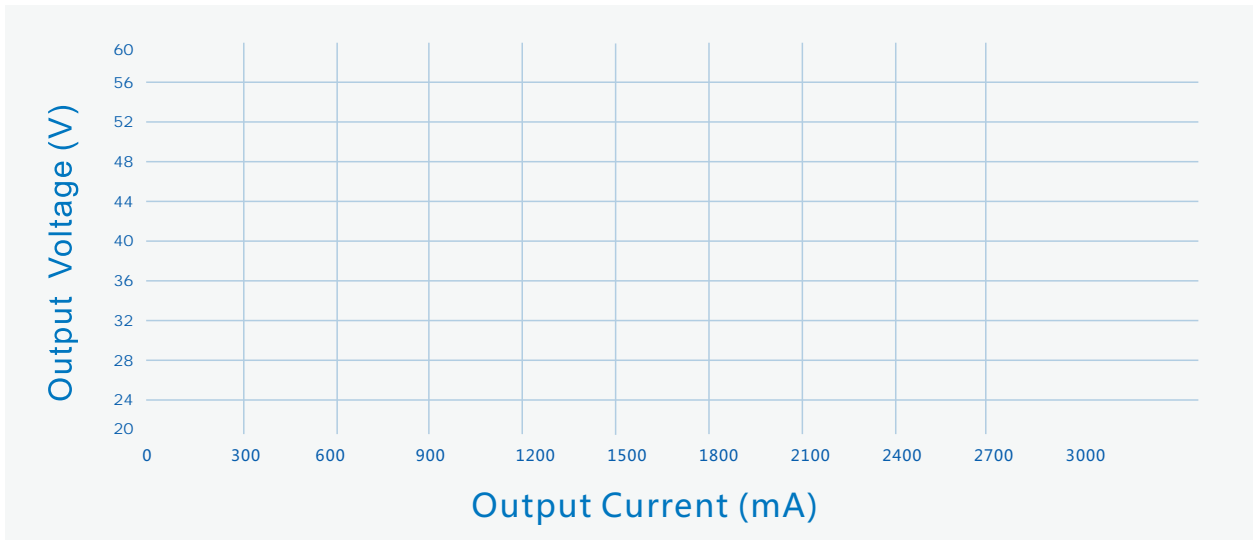


Vs. (Vin=277Vac)




Vs. (Vin=347Vac)

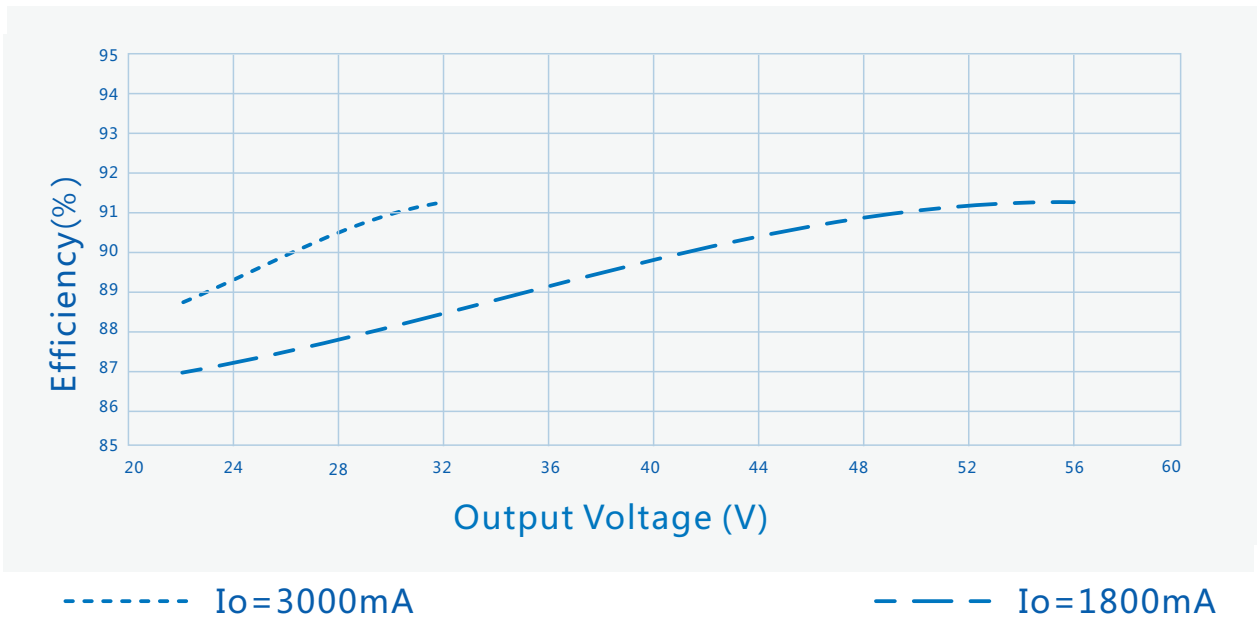

Vs. (Vin=480Vac)

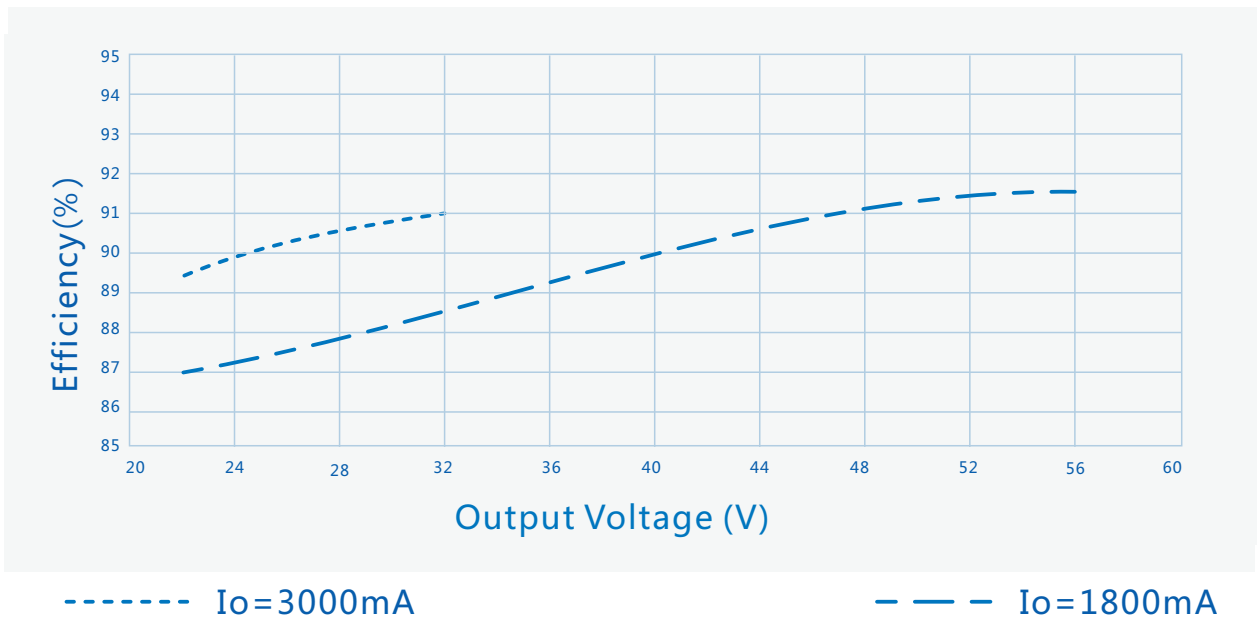


Vs.

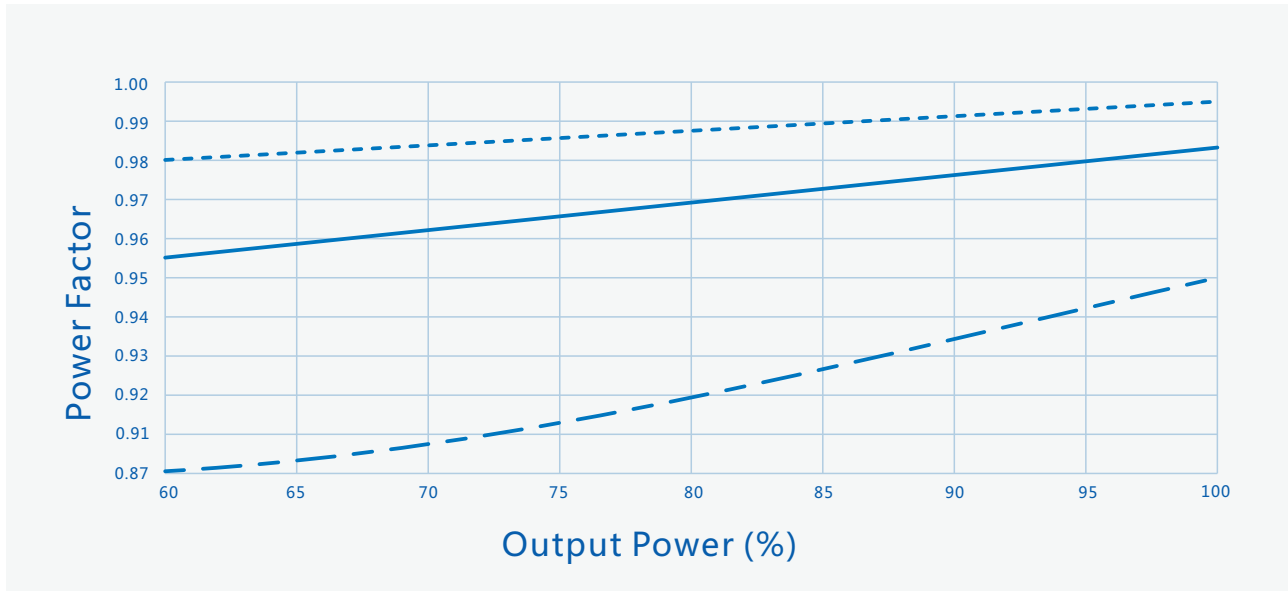

----- Vin=277Vac ——— Vin=347Vac - - - Vin=480Vac

Vs.

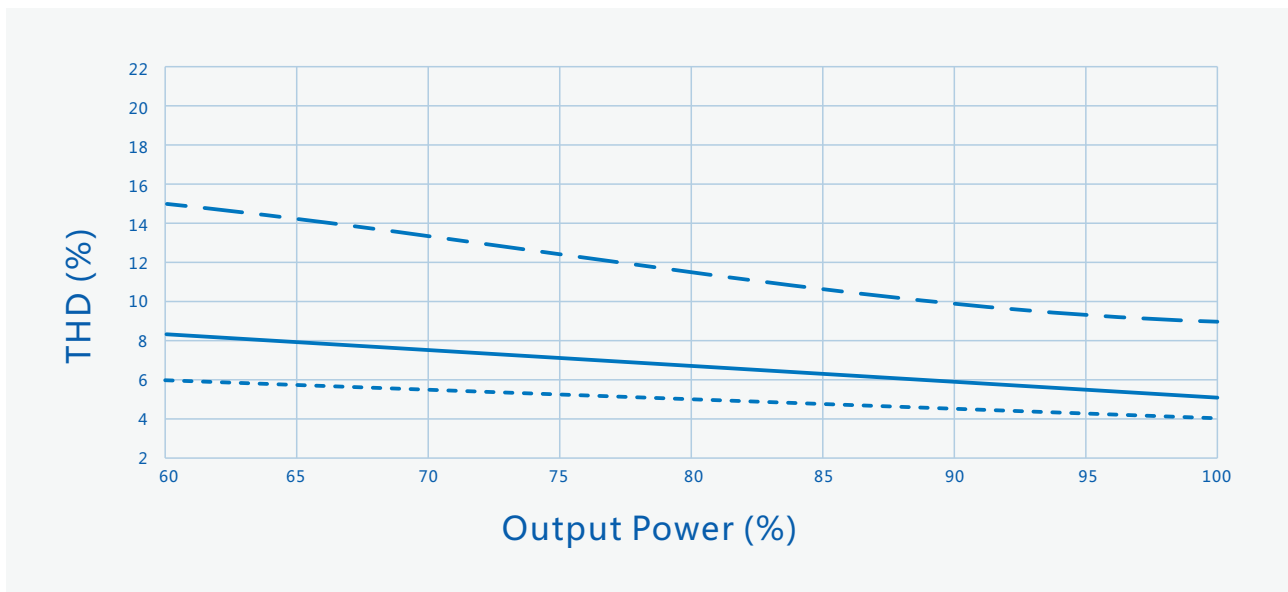


----- Vin=277Vac ——— Vin=347Vac - - - Vin=480Vac




SS-100SA

LED

Vs. (60)

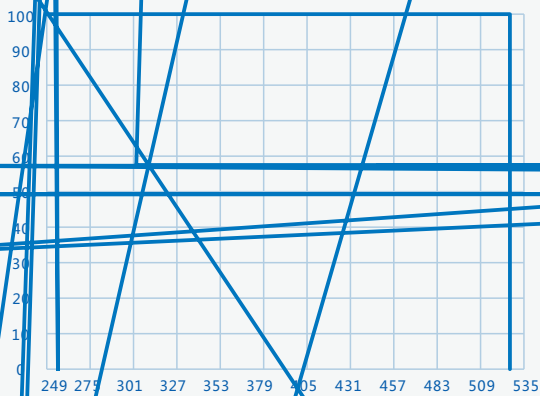

Vs.

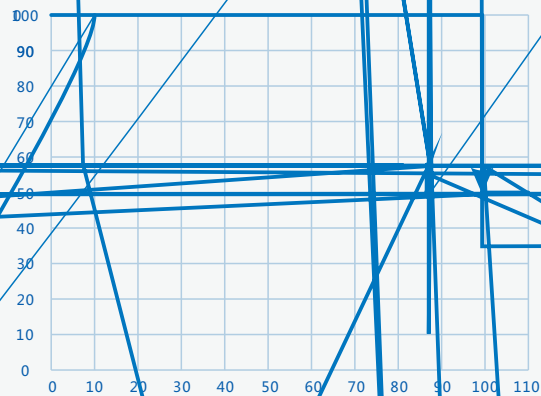

Vs.

Vs.



- mm) : × × = 495×385×162;
- 9
- 1.1kg 11.4kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



