


: SS-240CP-54*
: 240W LED
: V08
: 2023-02-01

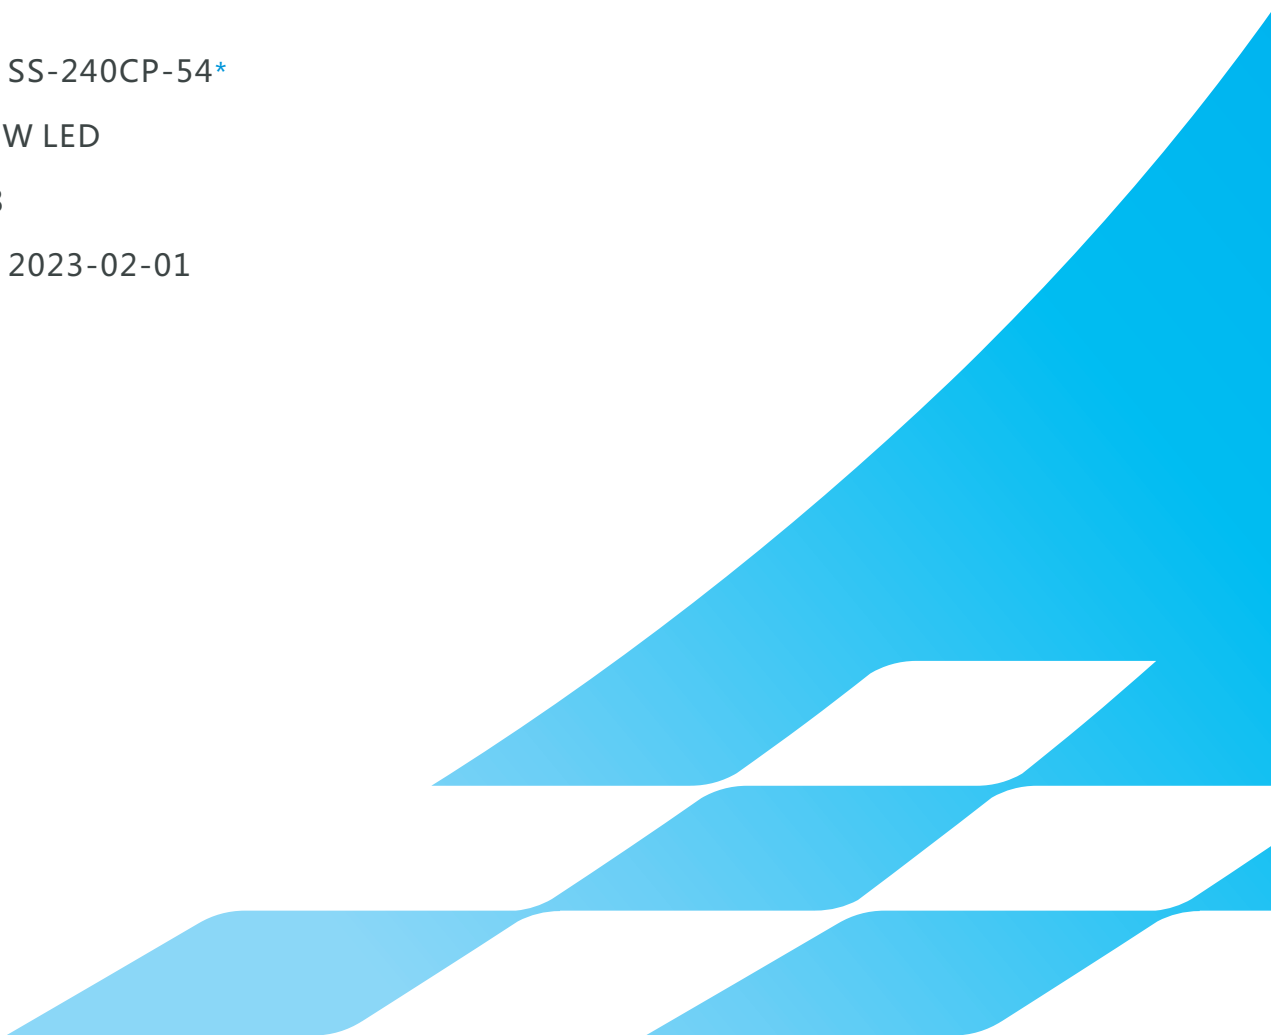

-
- 防
- 质保


--

型号

--	--	--	--	--	--	--	--	--	--

	120Vac		277Vac	
	108Vac		305Vac	
	47Hz		63Hz	
			3.0A	108Vac

(120Vac)			50A	
(220Vac)			95A	冷机启动
(277Vac)			125A	冷机启动
			5W	220Vac/50Hz, 空载
	0.95	0.98		220Vac/50Hz, 满载
	0.90			120-277Vac/50Hz, 70-100%载
		7%	10%	220Vac/50Hz, 满载
			20%	120-277Vac/50Hz, 70-100%载

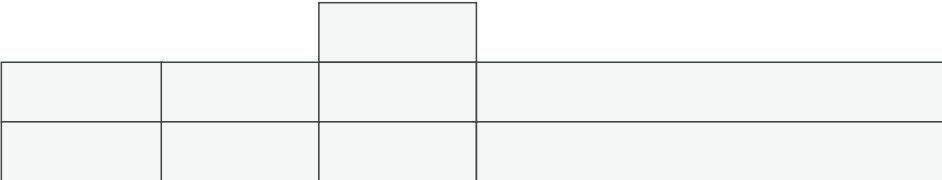


1-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+ /DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+ /DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
		10Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
	65	100,000 hours			80%
	77	55,000 hours			80%
MTBF		205,000 hours			220Vac, 25 (MIL-HDBK-217F)
		IP65			
		85			
		5			75
		1950g			
		182mm*71.5mm			x

25 LED




_____ t _____

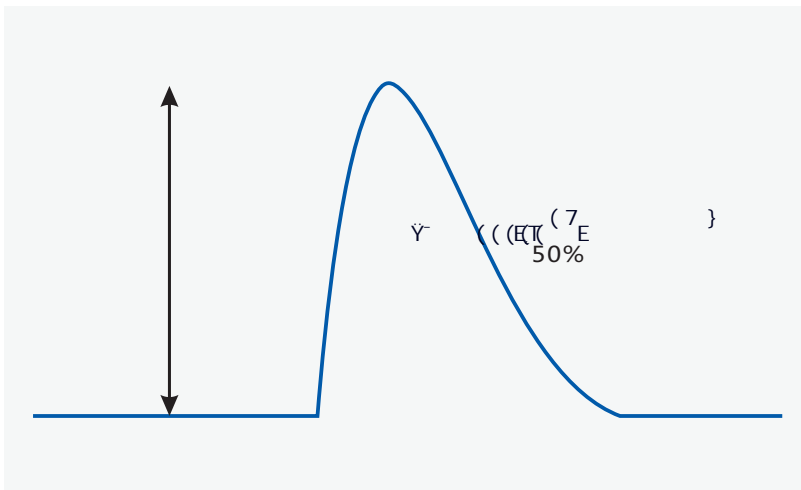

		T(@ 10%)	T(@ 50%)
120Vac	50A	600uS	
220Vac	95A		370uS
277Vac	125A	500uS	




Vs. (/AOC)

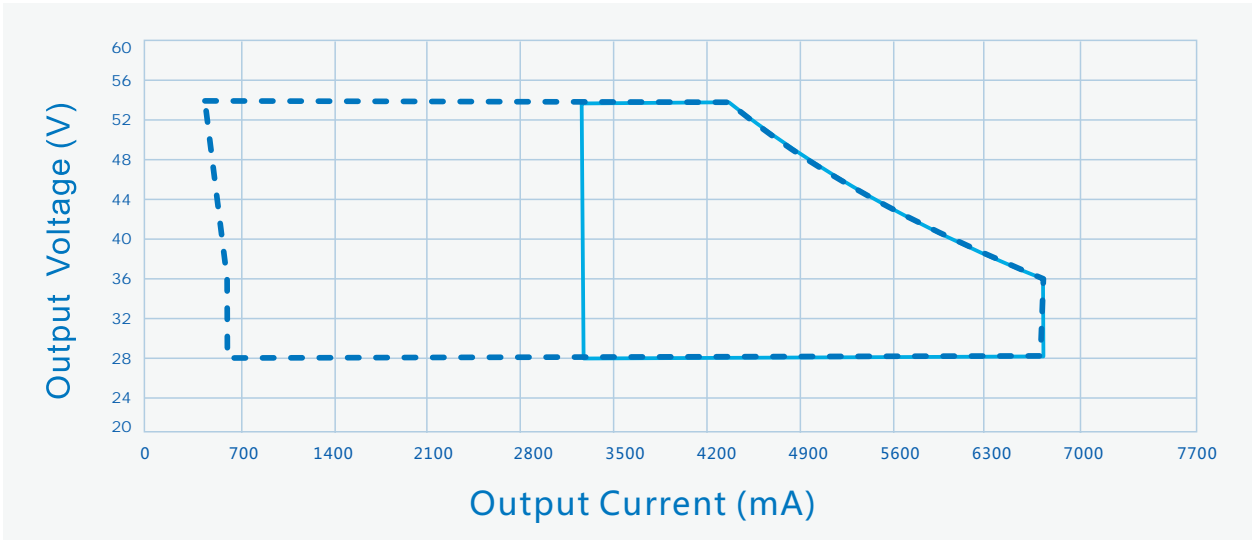


----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)

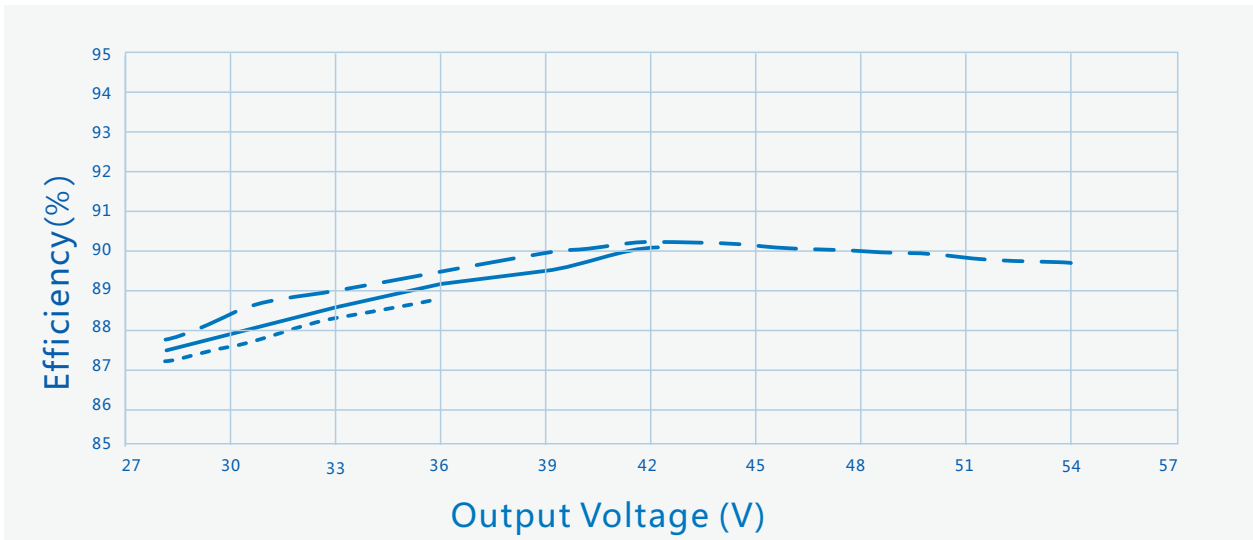


----- Io=6700mA ————— Io=5550mA - - - Io=4400mA

Vs. (Vin=220Vac)

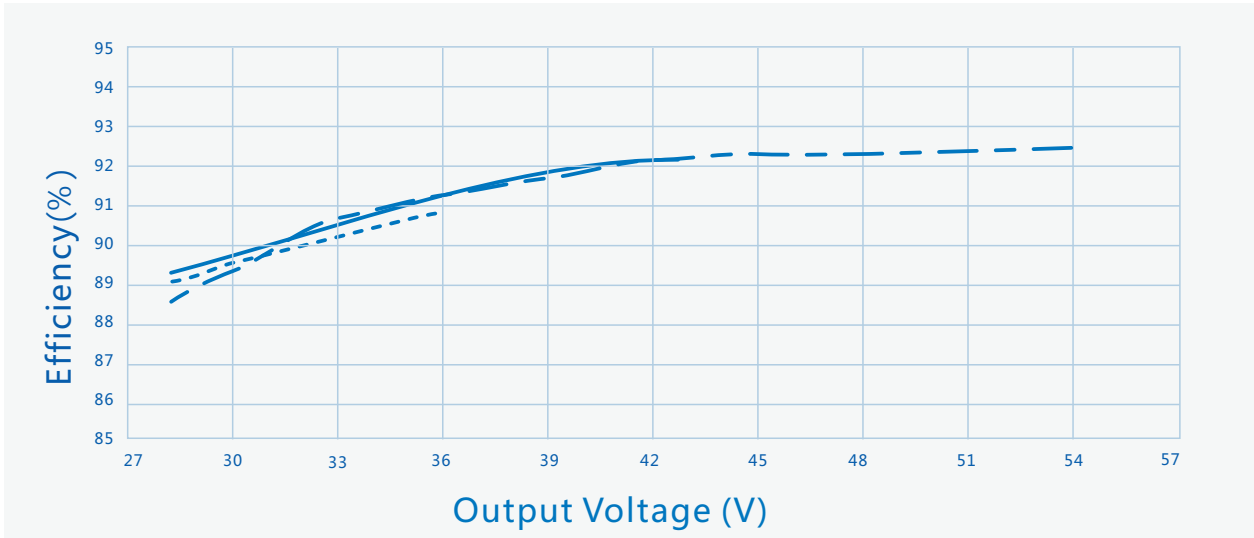

----- Io=6700mA ——— Io=5550mA - - - Io=4400mA


Vs. (Vin=277Vac)

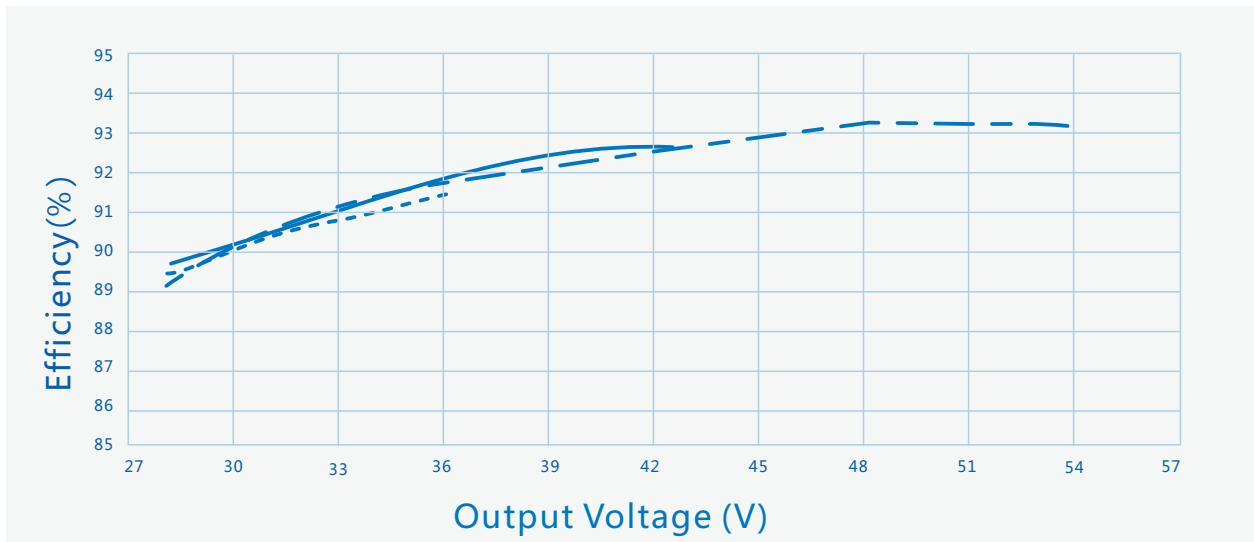

----- Io=6700mA ——— Io=5550mA - - - Io=4400mA




Vs.

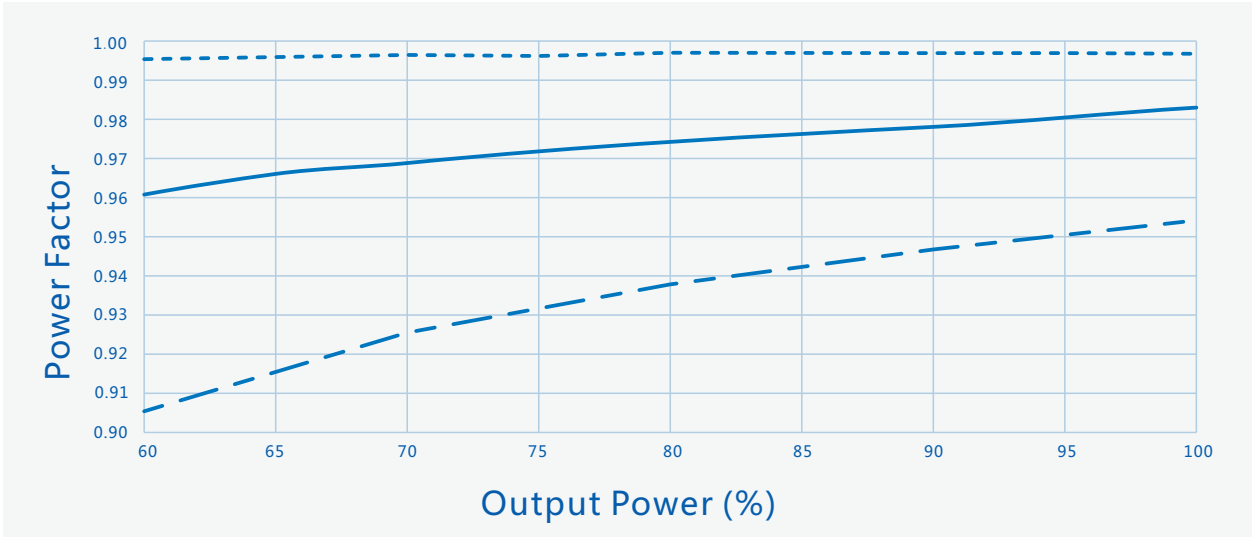

----- Vin=120Vac ————— Vin= 220Vac - . - . Vin=277Vac


Vs.

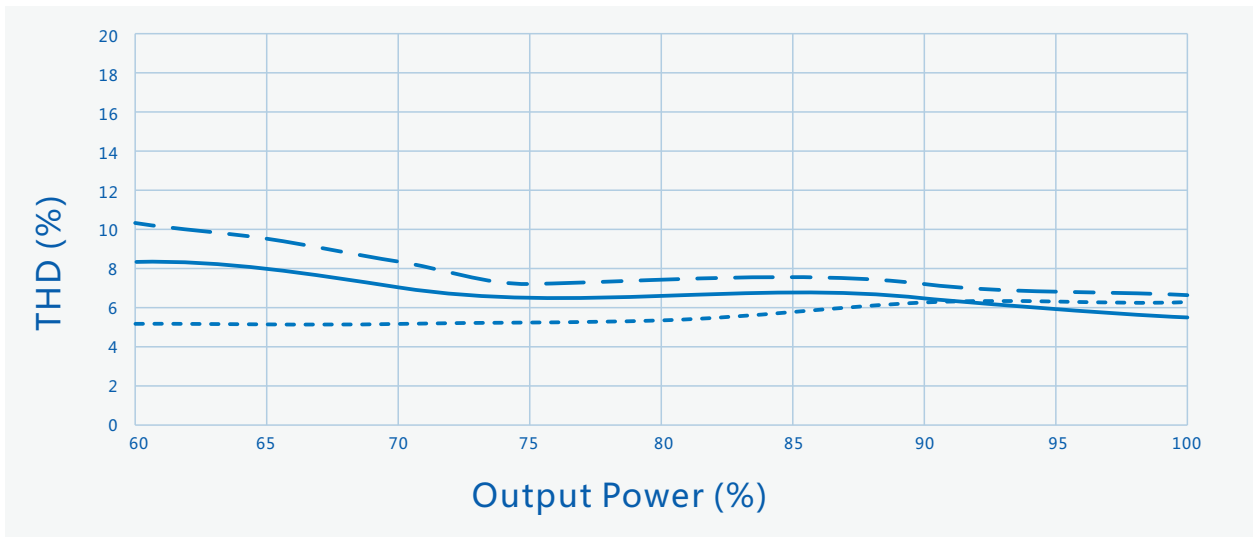


----- Vin=120Vac ————— Vin= 220Vac - . - . Vin=277Vac




Vs. (60)

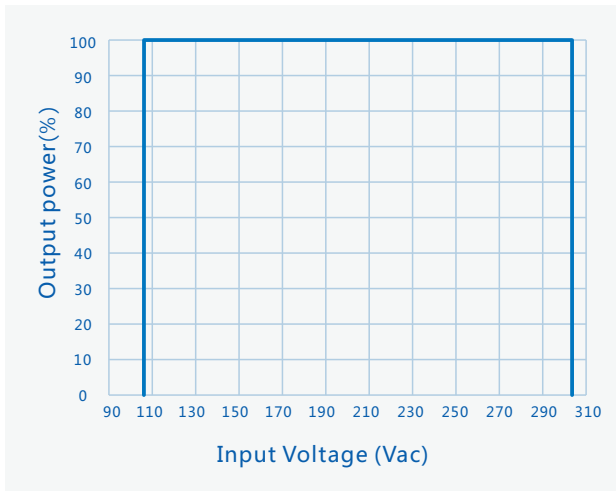


Vs.

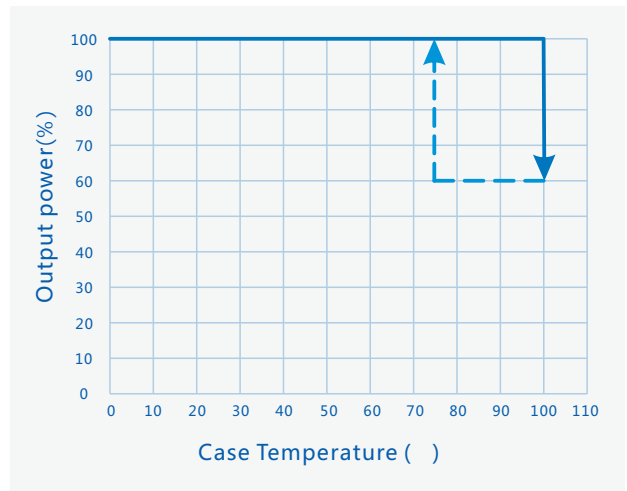

Vs.

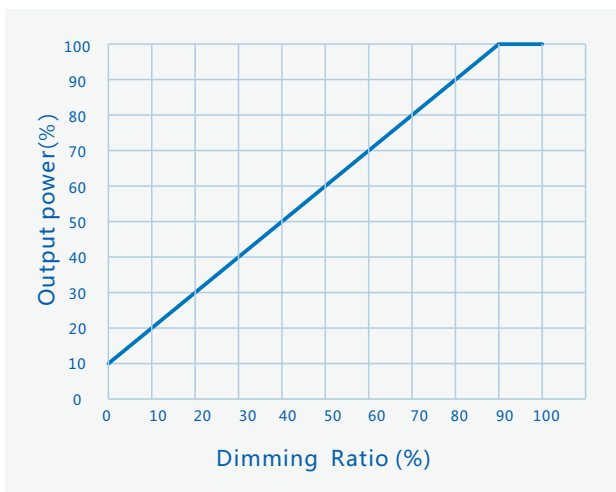

Vs.

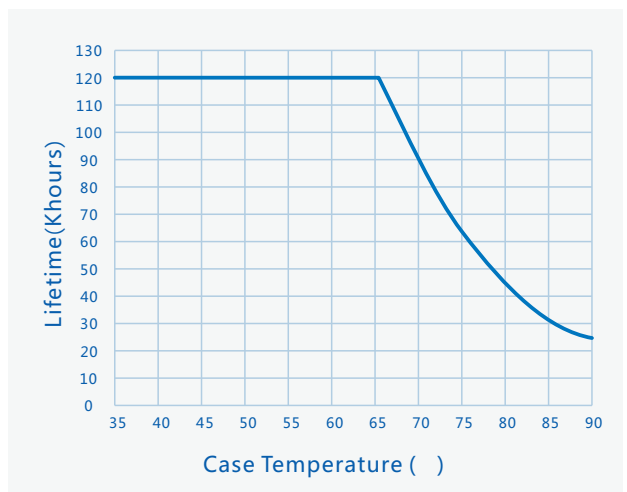

AC (**300±10mm**)

SJTW 3*18AWG :7.8mm :L :N
H05RN-F 3*1.0mm² 7.3mm, :L
SJOW 3*17AWG, :8.0mm :L
IS:9968 3*1.0mm², :7.4mm

DC (

SJTW 2*14AWG
/ H05RN
SJOW

DIM





1 , , 704

2

- mm) : × × = 580×433×210;

- 8

- 1.95kg 17kg

-

。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



V00		2019/01/22	
V01		2019/04/25	
V02		2019/06/17	
V03		2019/09/09	
V04		2020/03/05	
V05		2020/05/09	
V06		2021/07/02	
V07		2021/09/02	
V08		2023/02/01	

