

规格书

: SS-240VP-HXX

: 240WLED

: V02

: 2023-09-13



SS-240VP-H LED

" * "

" * "	DALI (:D)	AUX 12V (:H)	NTC (:N)	Timing	0-10V/PWMDim /Resistor (:B)	
BH		✓		✓	✓	
DH	✓	✓				



	100Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			3.0A	120Vac
			280W	120Vac
(120Vac)			70A	
(220Vac)			130A	
(277Vac)			150A	
			0.5W	220Vac/50Hz, STB
	0.95	0.97		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100% 负
		8%	10%	220Vac/50Hz
			20%	100-277Vac/50Hz, 70-100% 负



(SS-240VP-H56*)



SS-240VP-H LED

		10.8V	12V	13.2V	
		0mA		200mA	
0-10V		0V		12V	
		10% I _{omax}		100% I _{oset}	DIM+ 110uA
		0V		10V	DIM+/DIM-
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 110uA
	PWM	1KHz		2KHz	DIM+/DIM-
	PWM	0%		100%	
		0Kohm		100Kohm	
		10% I _{omax}		100% I _{oset}	DIM+ 110uA
		7%	8%	9%	PWM,
		8%	9%	10%	PWM,
DALI		1-170(10%)		254(100%)	
					DALI
DALI		DALI-2			
					DALI
					DALI
	75	50,000hours		80%	
MTBF		198,200hours		220Vac, , 25 (ML-HDBK-217F)	
		IP67			
		90			
		5			75
		1250g			
		244mm*71mm*39.6mm			x x

1, 25 LED N,
 2, :91K /N.
 0-100% ,




SS-240VP-H LED

Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN IEC62384:2020	✓	
UKCA	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015	✓	
RCM	AS/NZS61347.2.13		
CCC	GB19510.1-2009;GB19510.14-2009	✓	
CE	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015	✓	

EMI/EMS		/		
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B		
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B		
	IEC/EN 61000-3-2	Class C		
	IEC/EN 61000-4-5	B	10kV	6kV
	ANSI/C82.77-5-2017	B	6kV	6kV
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV	6kV)






Vs.

/AOC




Vs. (Vin=220Vac)

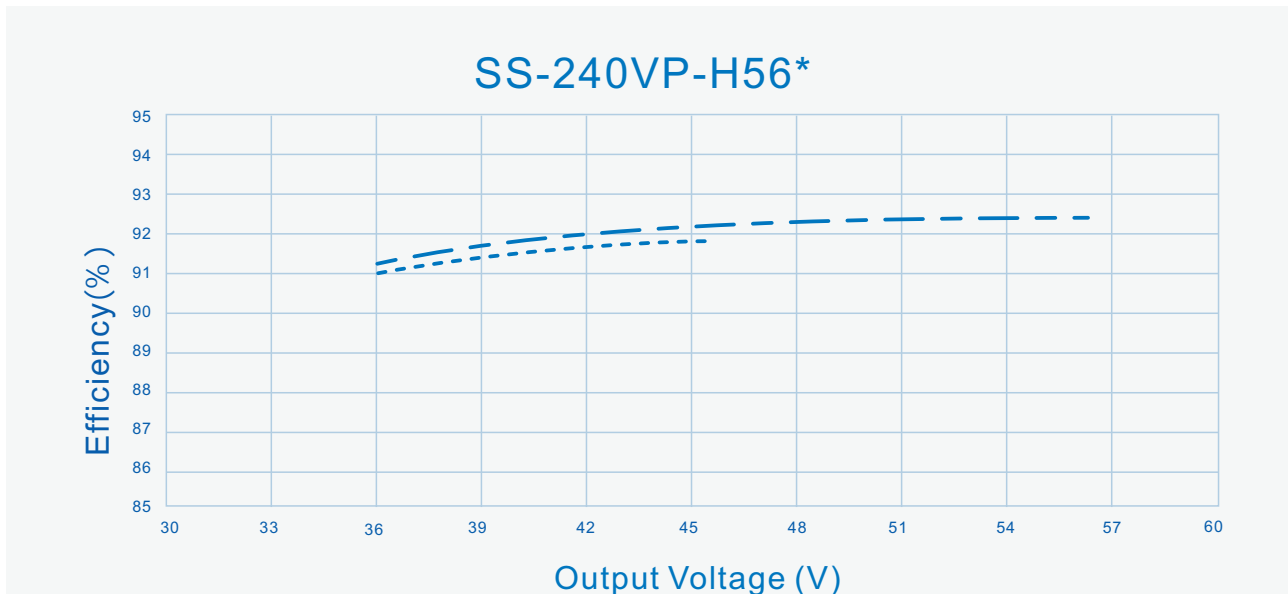

----- Io=5220mA

- . - . Io=4300mA



Vs. (Vin=277Vac)

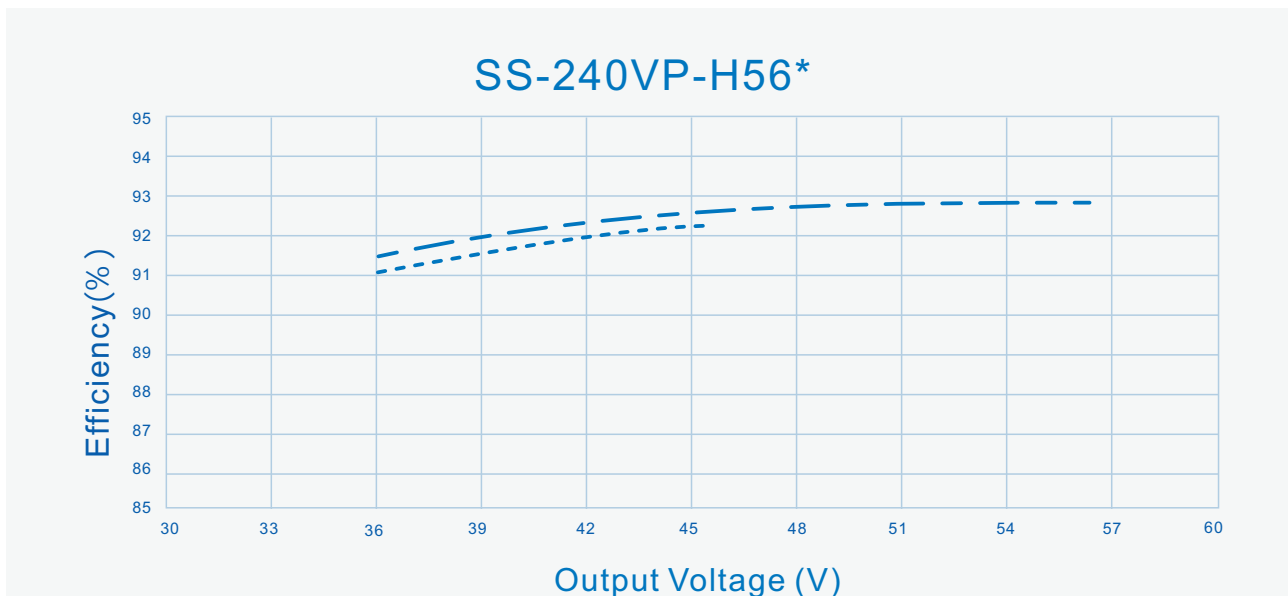

----- Io=5220mA

- . - . Io=4300mA



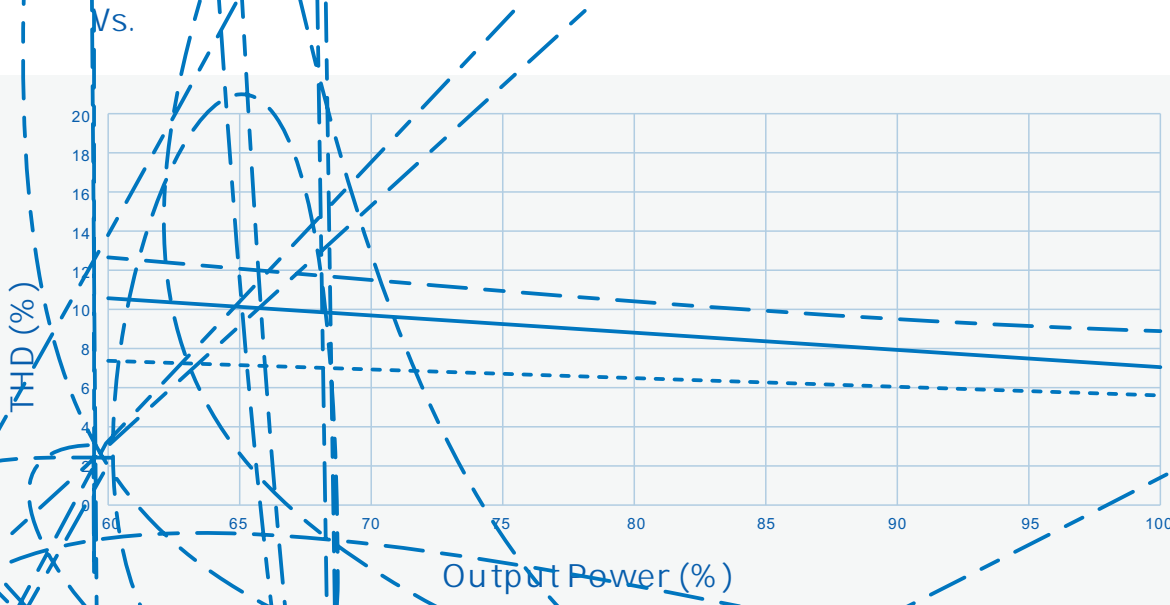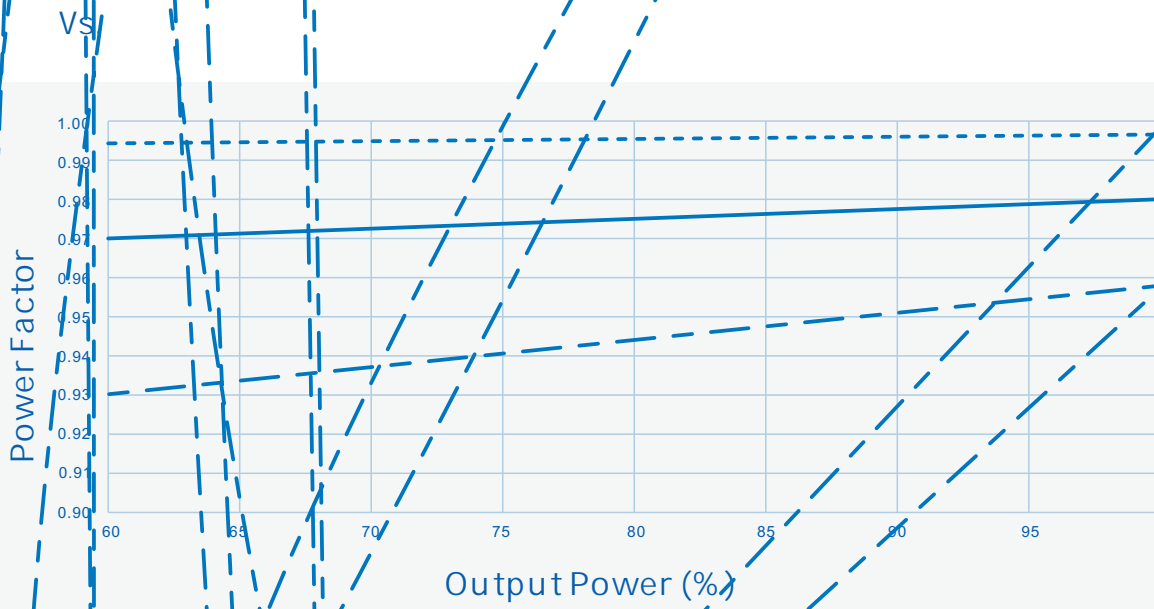


Vin=120V


Vin=277V



SS-240VP-H LED

- 1
- 2
- 3 PC

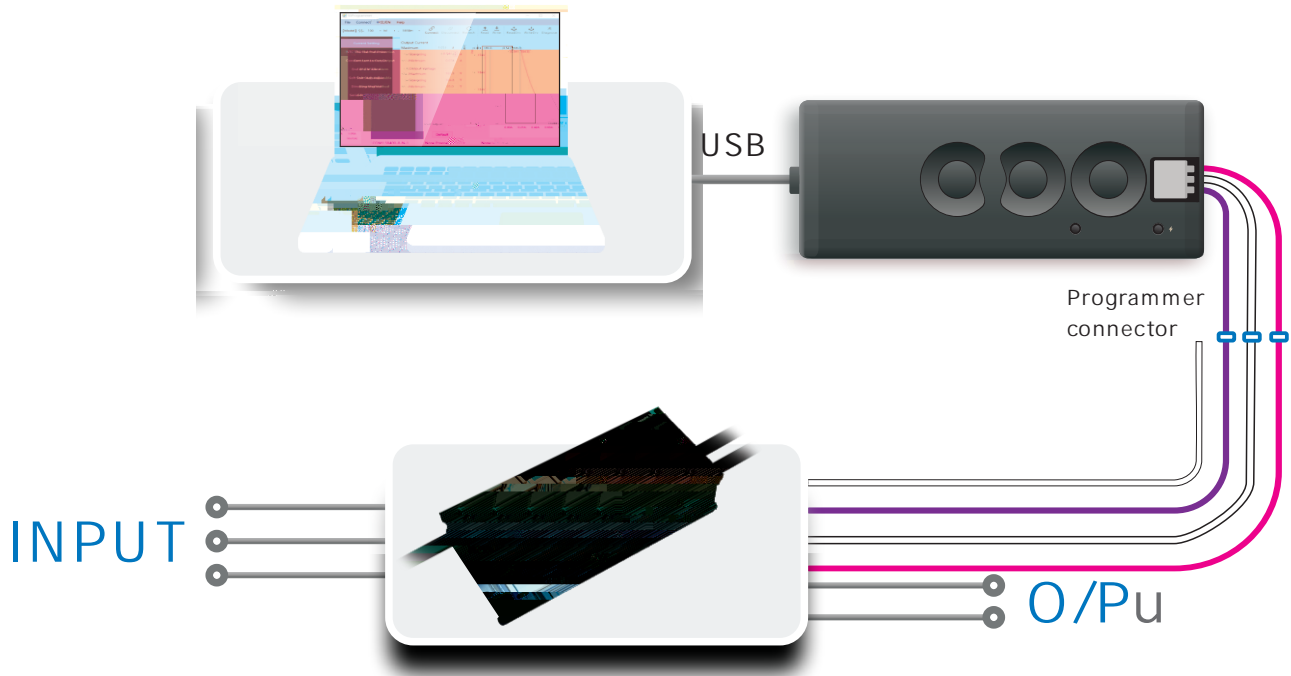





- mm × × =495× 385× 162;
- 14
- 1.25k



V00		2021/07/21	
V01		2021/09/02	
V02	DALI-2	2023/09/13	

