



b

s







Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	



UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		




EMI/EMS	/		
	EN IEC 55015:2019+A11:2020		
	EN IEC 55015:2019+A11:2020		
	IEC/EN 61000-3-2:2019+A1:2021	Class C	
	IEC/EN 61000-4-5	B	6kV 6kV
	IEC/EN 61000-4-12	B (6kV, 6kV)




86-755-29358816

Vs. (/AOC)

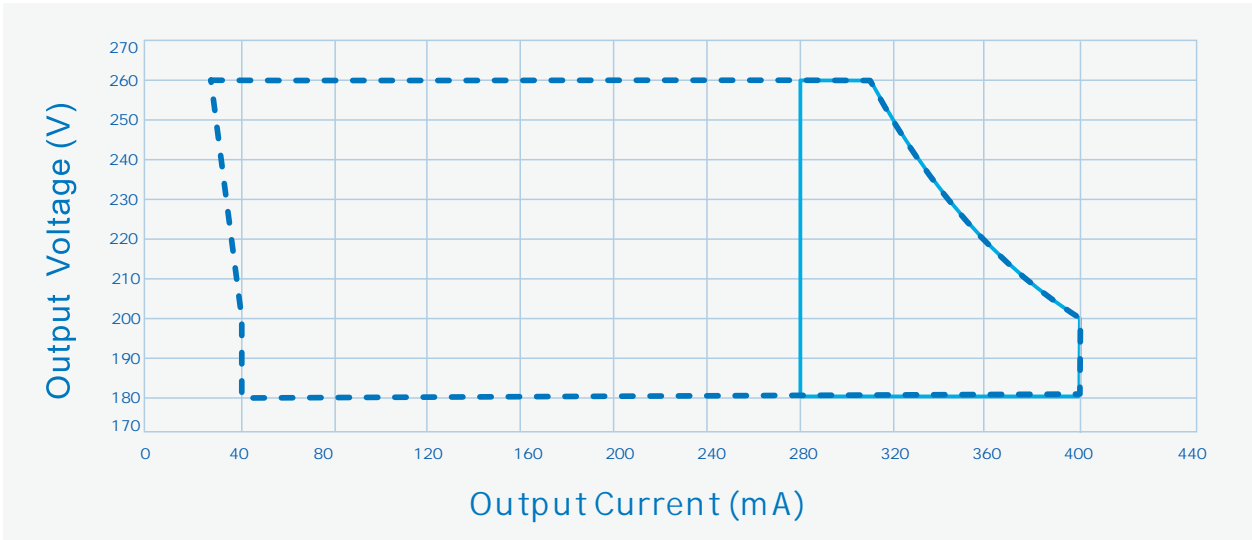


----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)

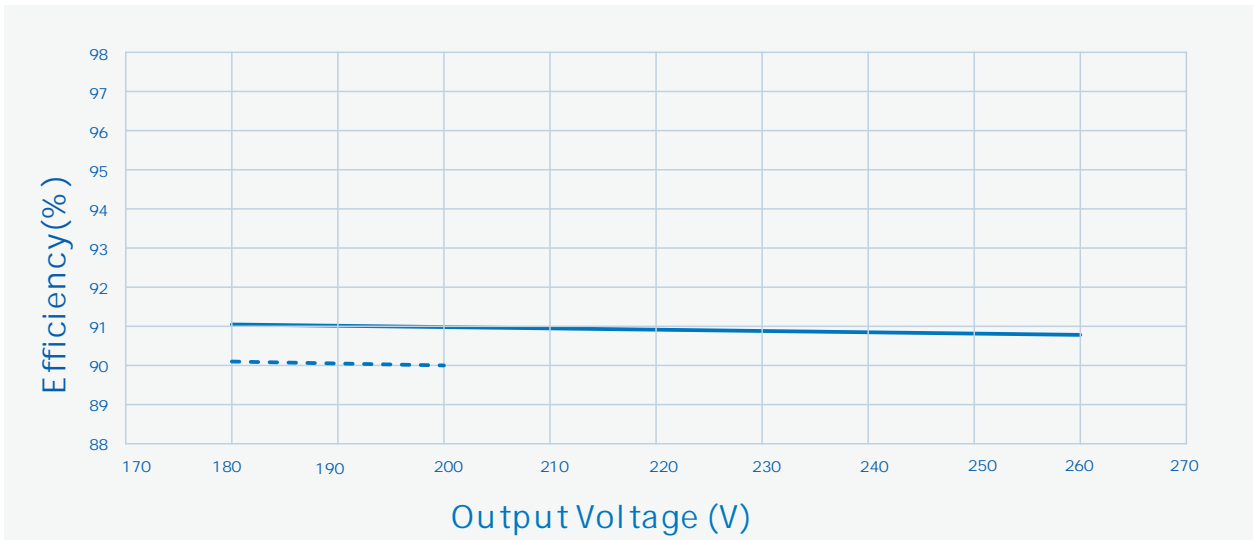

----- Io=400mA ————— Io=308mA



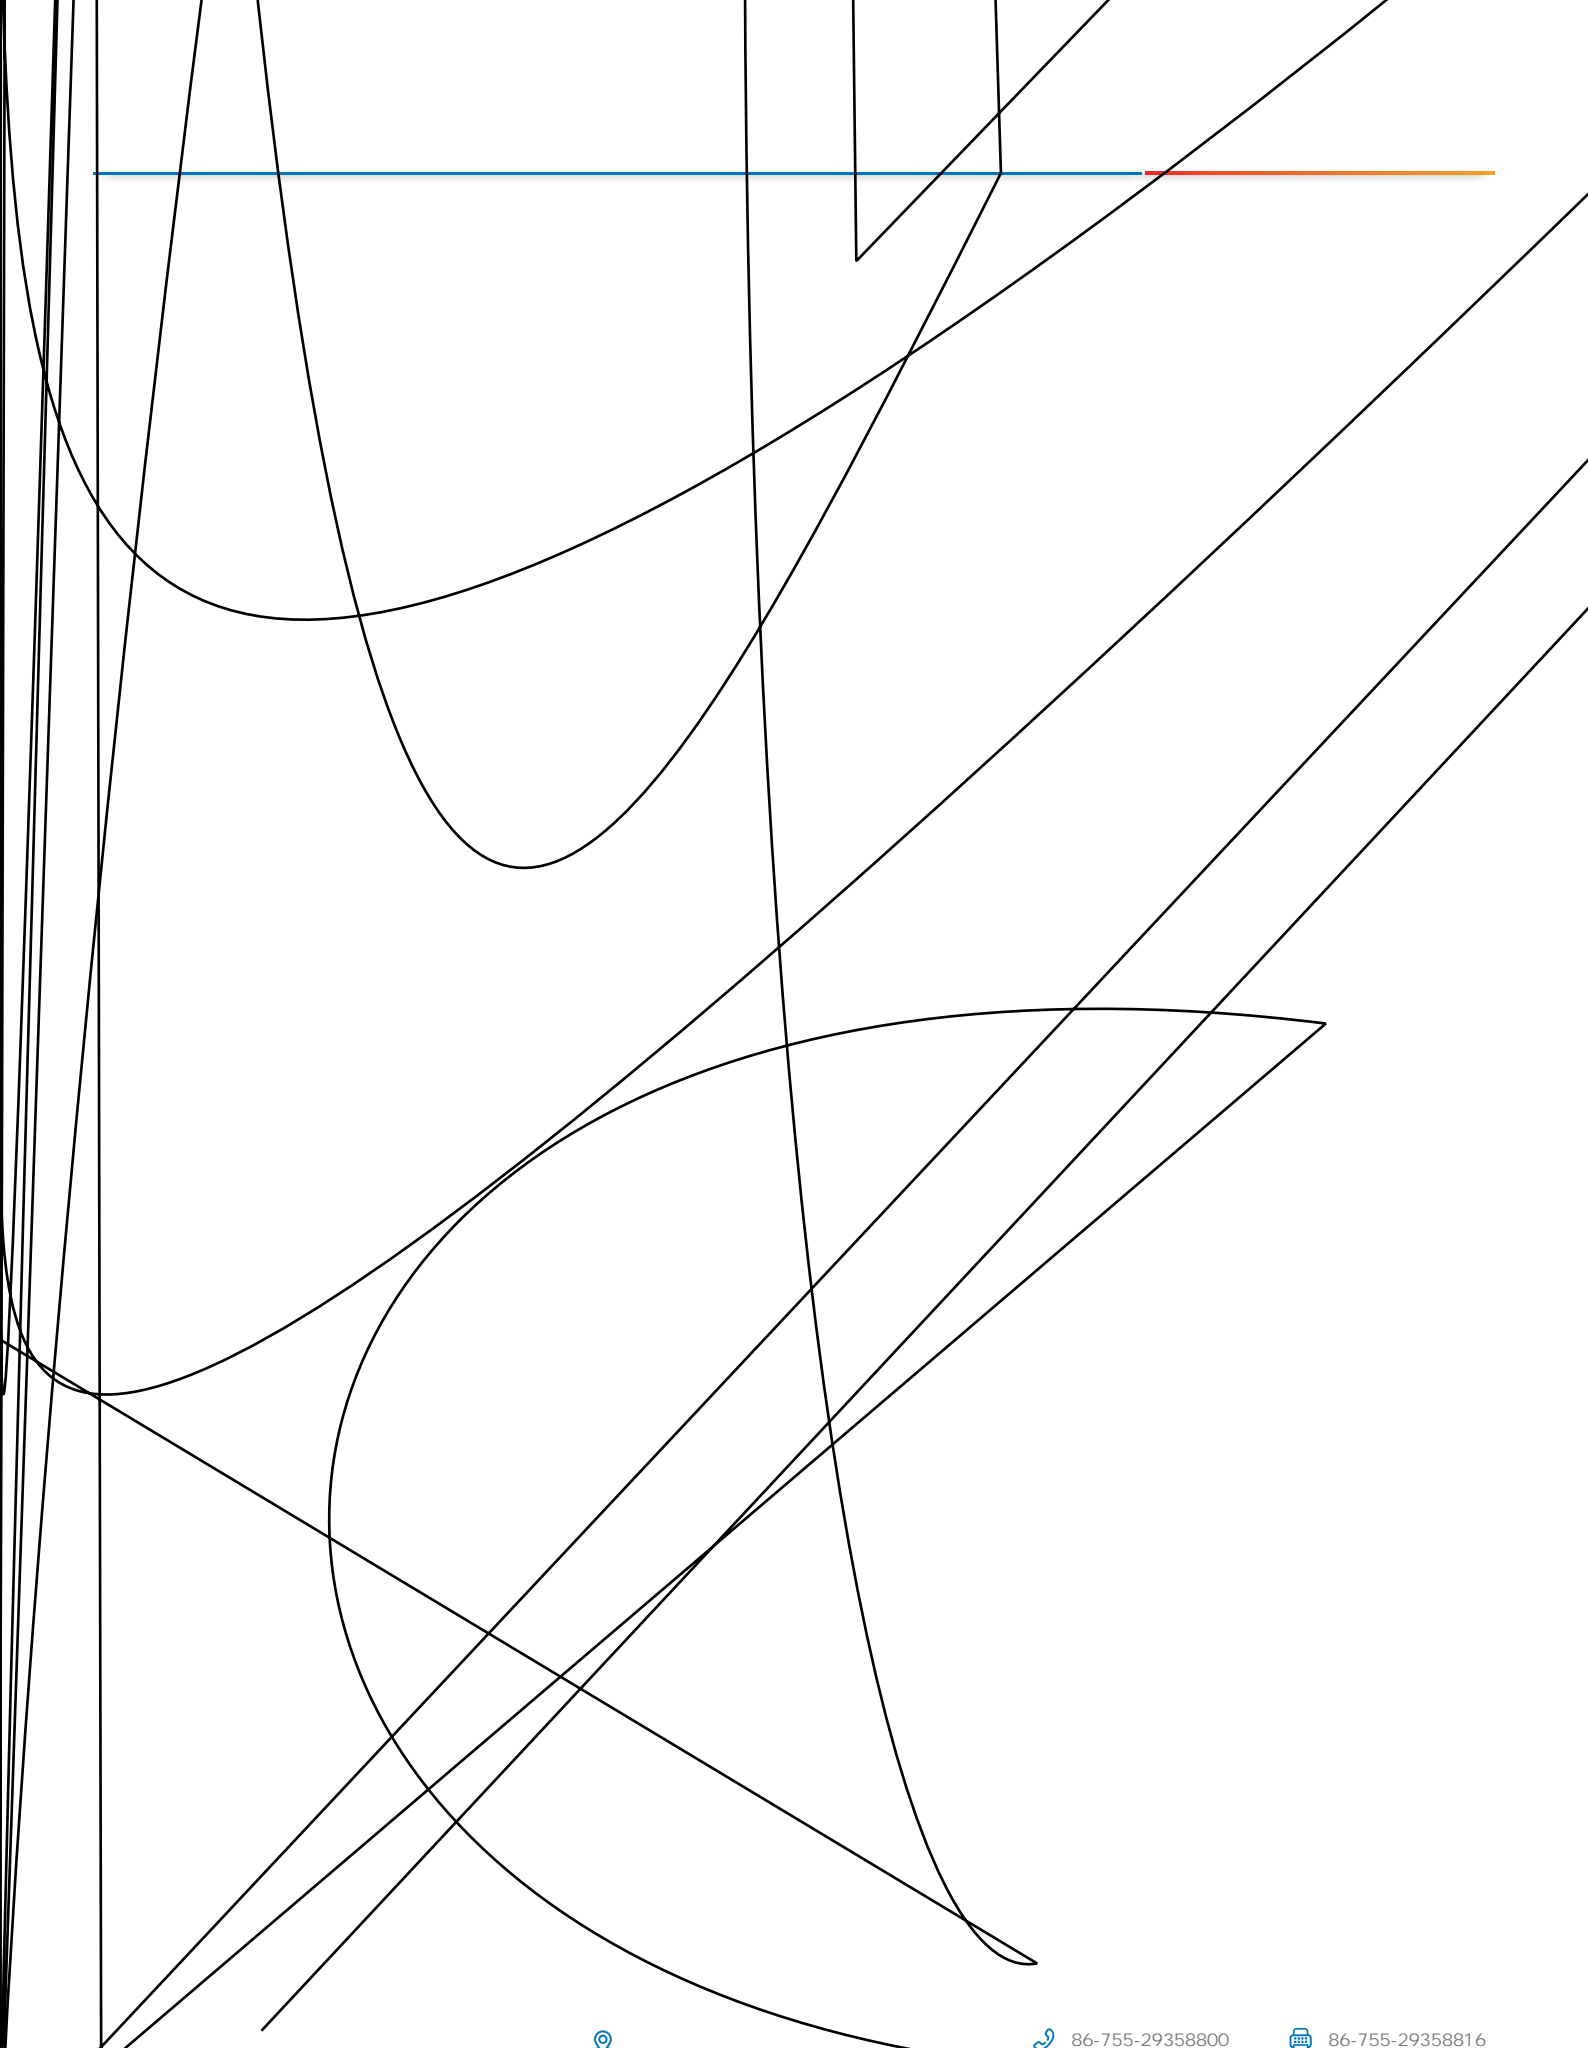


Vs.

Vs.









1				704
2				
3	" "	" "	55 "	380cm ²
	115cm ³ ;		LED	
4		6kV/	6kV	SPD
	SPD		SPD	
5、		5mm		
6、	LED+	LED-	1.8mm	
7、				
8	LED			
9	LED			
10		LED		
11				

-		mm	×	×	=495× 385× 162;
-		24			
-	0.372kg			13.9kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------





V00		2022/06/20	
V01	SPD	2022/10/26	
V02	TC	2022/12/02	
V03		2023/05/15	
V04		2023/09/12	

