

: SS-150NL-E260*
: 150WLED
: V05
: 2023-09-11



	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			1.8A	100Vac

(120Vac)			60A	冷机启动
(220Vac)			100A	
(277Vac)			130A	
			5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100%
		10%	13%	220Vac/50Hz
			20%	100-277Vac/50Hz 70-100%

	180V		260V	180-200V
	200V		260V	$P_o = V_o * I_o = 150W$
	0.57A		0.75A	0.75A 200V, 0.57A 260V
AOC	0.52A		0.75A	
			310V	
@ 120Vac	90.0%	92.0%		260V/0.57A
@ 220Vac	93.0%	95.0%		260V/0.57A
@ 277Vac	93.0%	95.0%		260V/0.57A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			1.5S	120Vac
			1.0S	220Vac
	-2%		+2%	
	-5%		+5%	
	-0.03% /		+0.03% /	0 90
	90	100	110	>Tc Typ. <Tc Min.



SS-150NL-E LED



0-10V		0V		12V	DIM+ 100uA
		10% I _{omax}		100% I _{oset}	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 100uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 100uA
		0% I _{omax}		100% I _{oset}	
		0.6V	0.7V	0.8V	
		0.8V	0.9V	1.0V	
	85	50,000 hours			
	MTBF	200,000 hours			220Vac, , 25 (MIL-HDBK-217F)
		90			
		5			85
		455g			
		185mm*45mm*31mm			x x

25 LED








	UL	TUV	
	1600Vac	1500Vac	
	1600Vac	3000Vac	
	500Vac	250Vac	
	10M		500Vdc
	0.1		25A/1min
	0.75mA		277Vac


1. EMC
2. LN
3. EMC

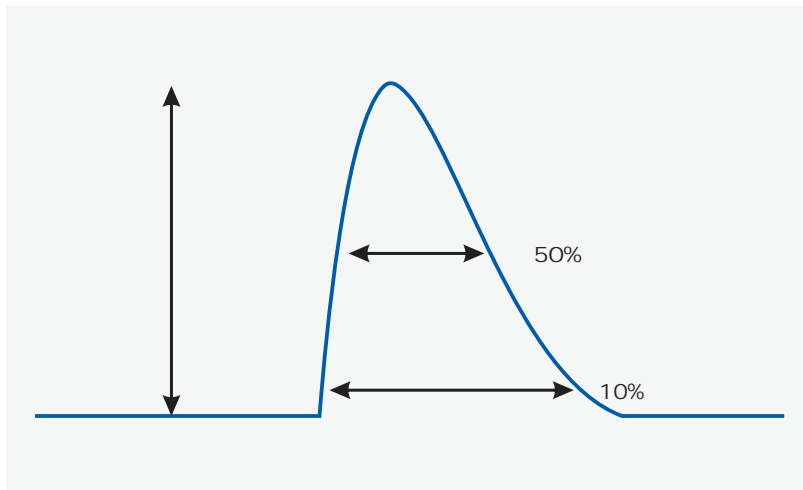

		T (@ 10%)	T (@ 50%)
120Vac	60A	400uS	
220Vac	100A		200uS
277Vac	130A	380uS	




Vs. (/AOC)

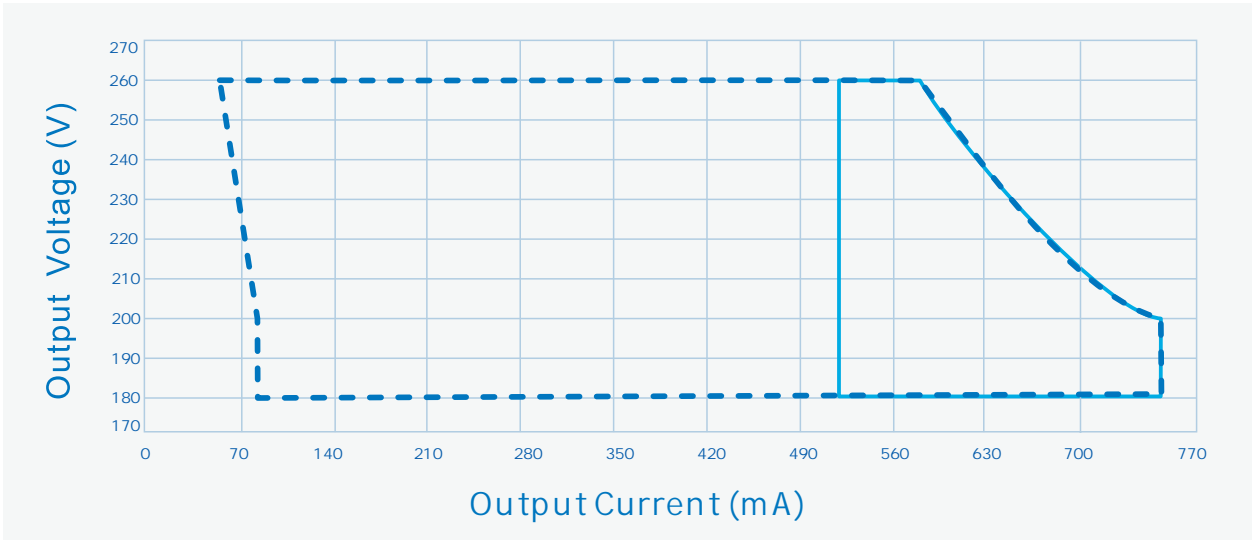

----- Dimming Window ————— AOC Window


Vs. (Vin=120Vac)

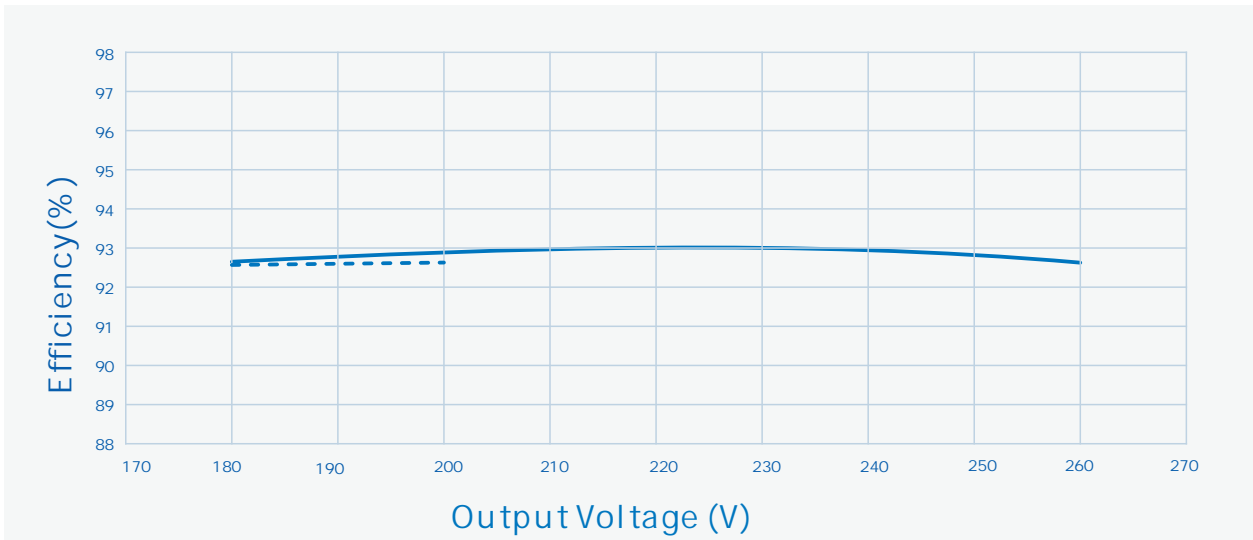

----- Io=750mA ————— Io=570mA




Vs. (Vin=220Vac)

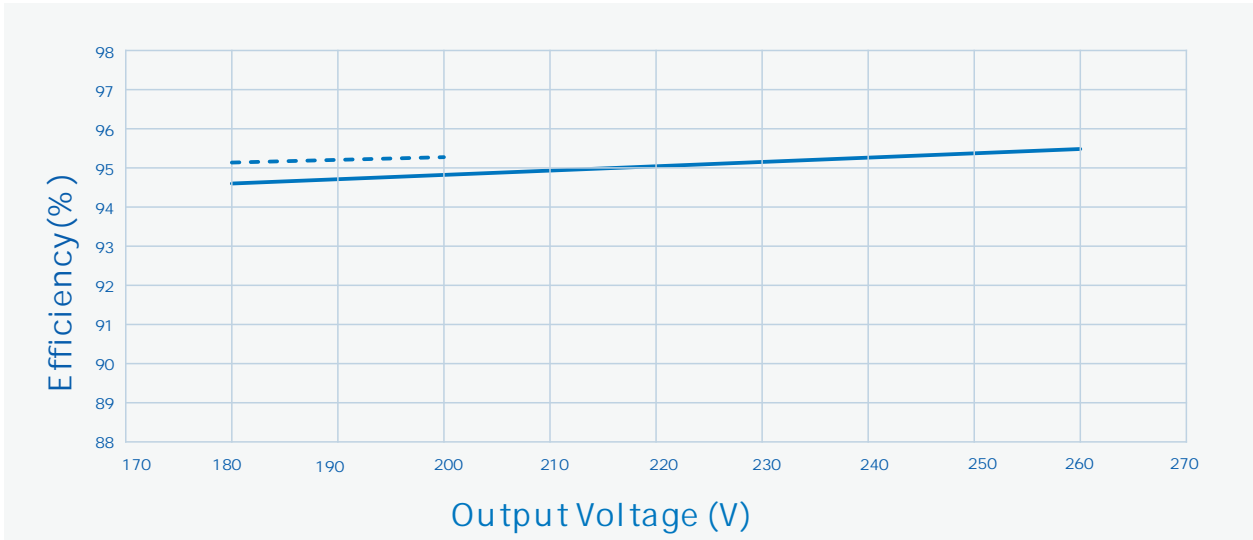

----- Io=750mA

———— Io=570mA

Vs. (Vin=277Vac)

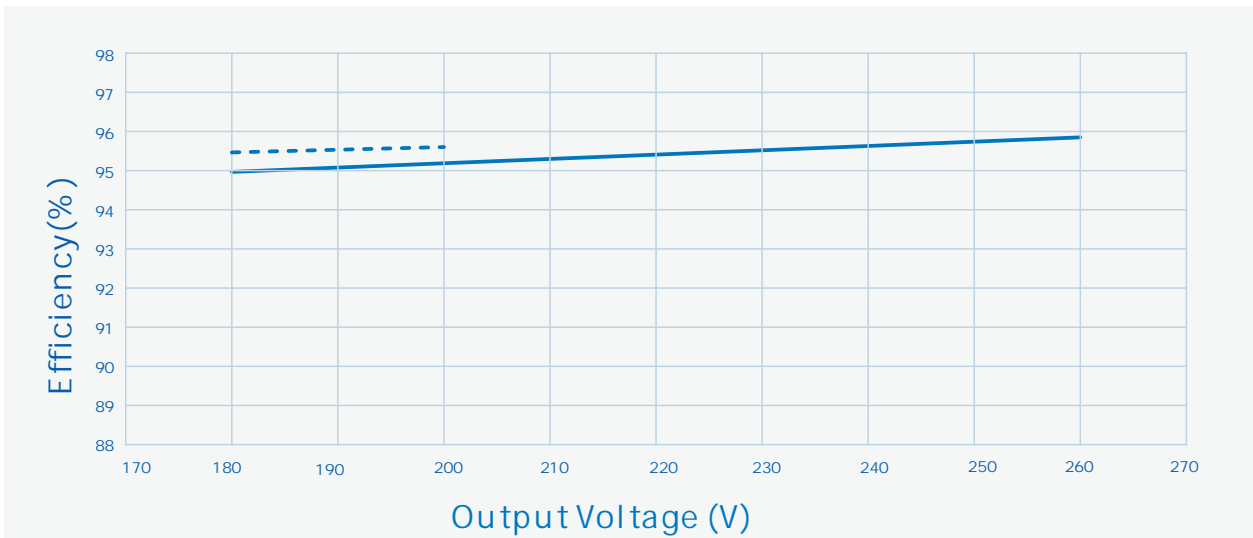


----- Io=750mA

———— Io=570mA




Vs.

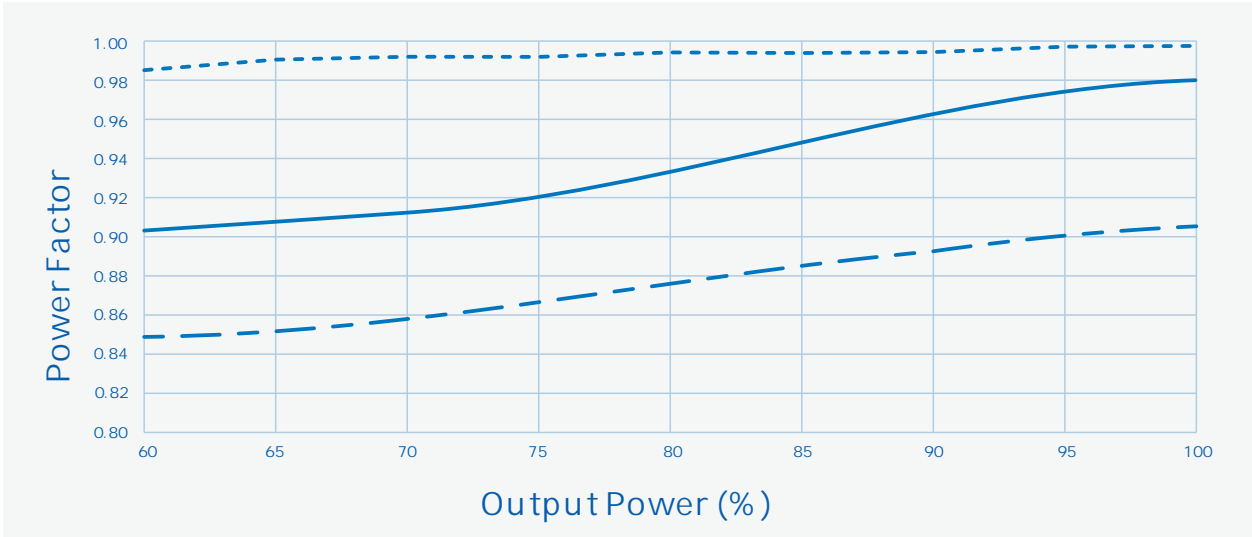

----- Vin=120Vac ————— Vin=220Vac - - - - Vin=277Vac

Vs.

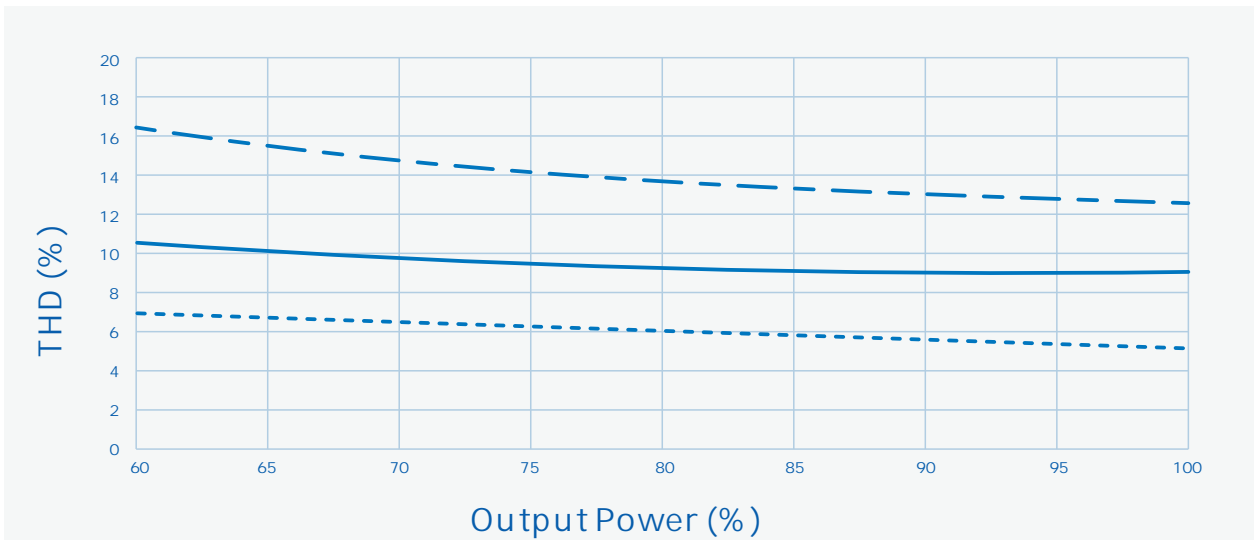


----- Vin=120Vac ————— Vin=220Vac - - - - Vin=277Vac



SS-150


1
00

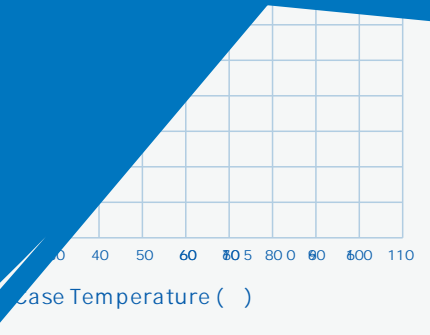




		mm(In.)
	L3	168.5(6.63)
	W2	45(1.77)
	H	31(1.22)
	L1	185(7.28)
	L2	178(7.01)
	W1	32(1.26)
Tc	X	28(1.1)
Tc	Y	24(0.94)

1 LED ;
 2 AC DC DIM / / ;
 10± 2mm;

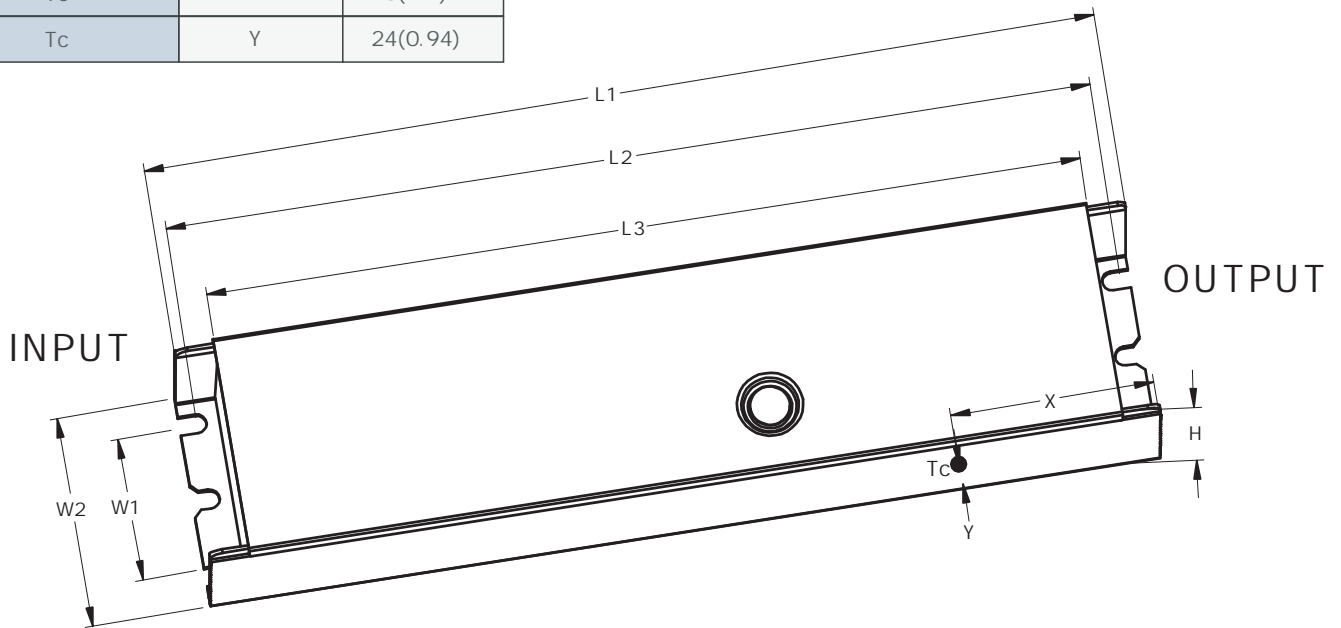

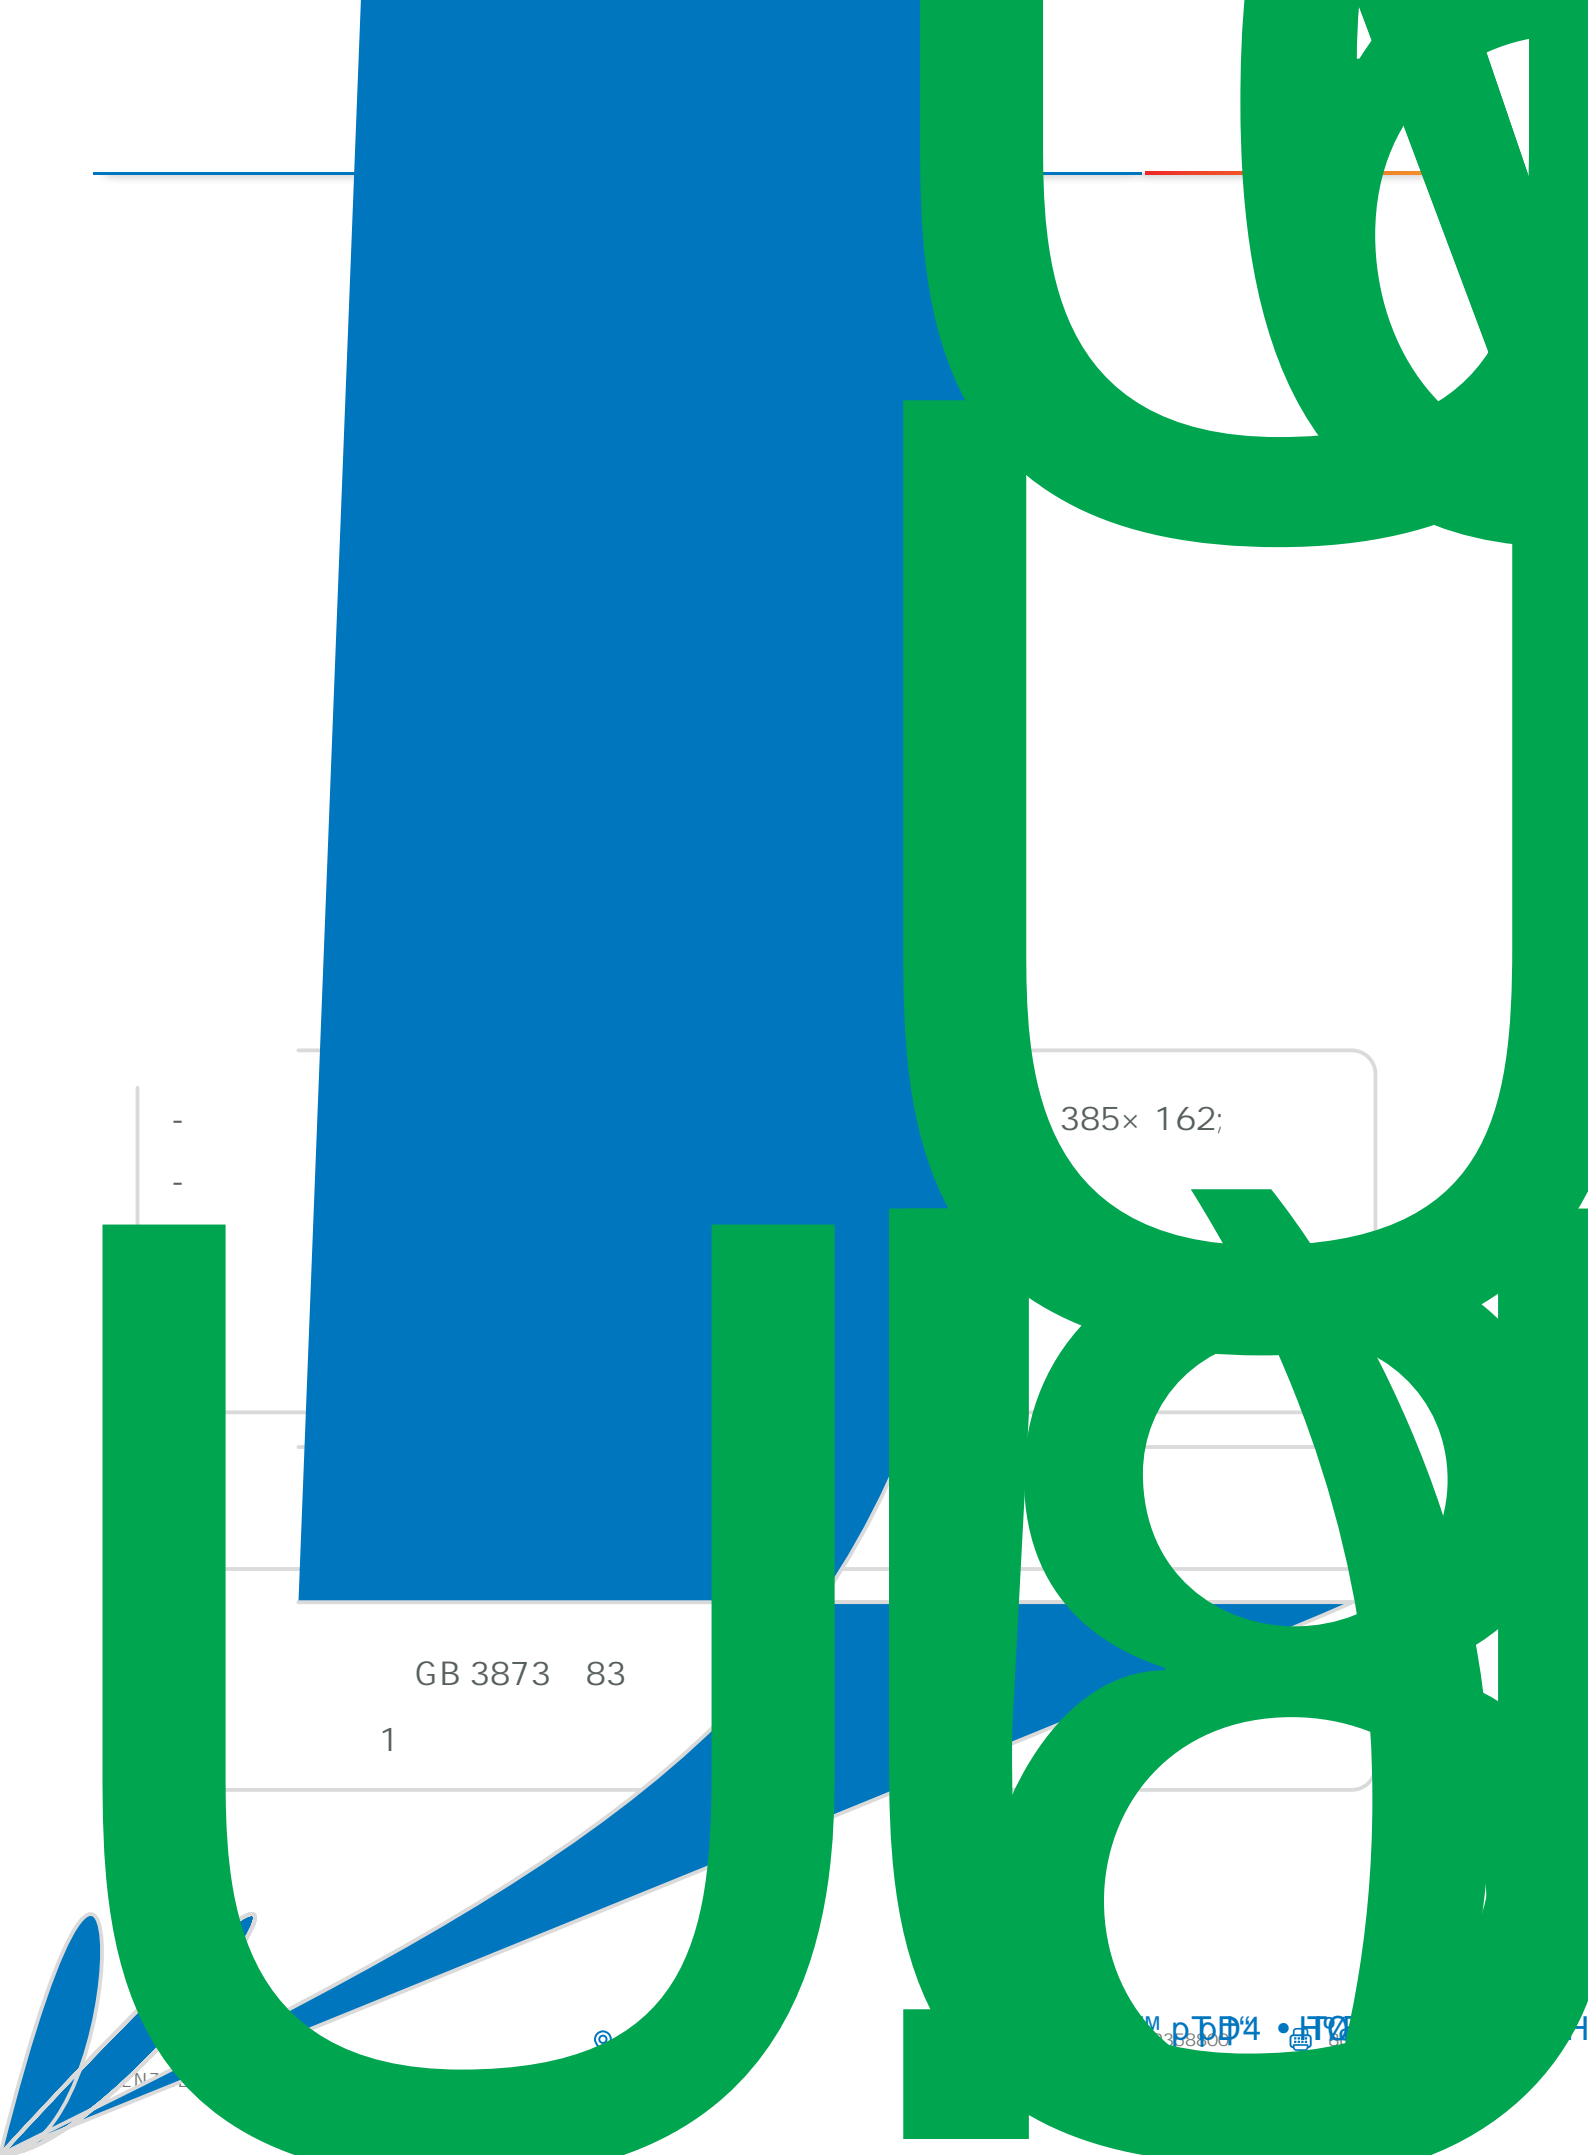

385x 162;

GB 3873 83

1

